




## Its only natural.

Neoflex™ is prefabricated rubber flooring made of polymerically bound recycled and synthetic rubbers. Neoflex™ Natural Series has the appearance of natural stone but incorporates the benefits of a hard wearing, resilient, sound deadening and economical rubber. The color palette emulates a stylish, modern yet completely natural look - the Neoflex™ Natural look.


Characteristic	Test Method	NTRL Series
<b>Thickness</b>		3 mm to 10 mm
<b>Roll Width</b>		1.20 m
<b>Density</b>		1,400 kg/m <sup>3</sup>
<b>Resilience</b>	DIN 18032-2	40%
<b>Tensile Strength</b>	DIN 18032-2	0.91 N/mm <sup>2</sup>
<b>Tear Strength</b>	ASTM D 624	9.7 N/mm
<b>Taber Abrasion</b>	ASTM C 504	0.66 gm
<b>Shore Hardness</b>	ASTM D 2240	60
<b>Remaining Indentation</b>	DIN 53960	0.05 mm
<b>Noise Absorption</b>	EN 21040 / ISO 140	13 dB (4 mm)
<b>Stainability</b>	ASTM D 543-95	
	Alcohol	No Change
	Ammonia	No Change
<b>Coefficient of Friction</b>	ASTM D 2047-97	Dry: 1.10 Wet: 1.03
<b>Slip Resistance</b>	AS/NZS 4586:2004	48 Mean BPM, Class W
<b>Thermal Stability</b>	ASTM C 1026	-40°C to 100°C
<b>Flammability</b>	EN 13501	Efl or Cfl-s1
<b>Total VOC</b>	ASTM D 5116	< 0.3 mg/m <sup>2</sup> /hr




# Standard Colors

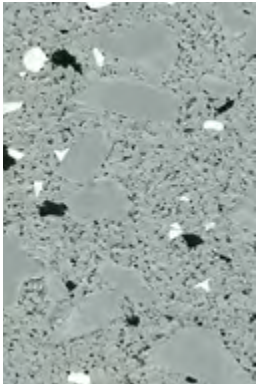

NTRL 1001

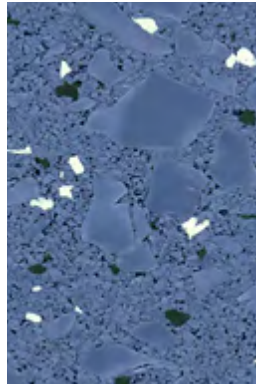


NTRL 1002

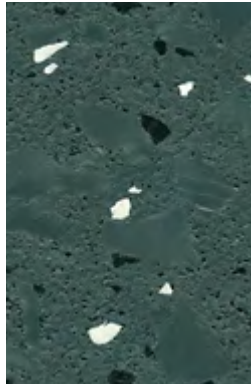


NTRL 1003




NTRL 1004

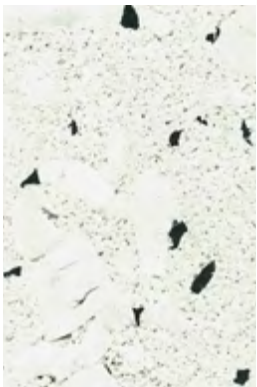


NTRL 1005

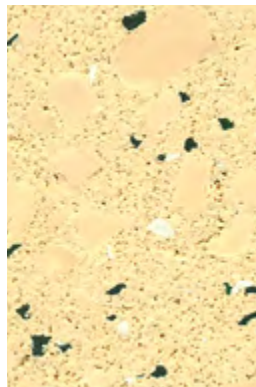


NTRL 1006

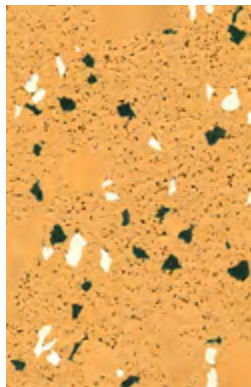


NTRL 1007

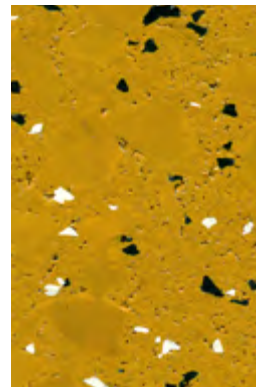


NTRL 1008

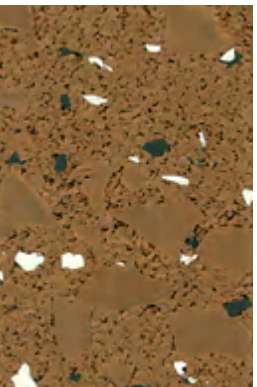


NTRL 1009

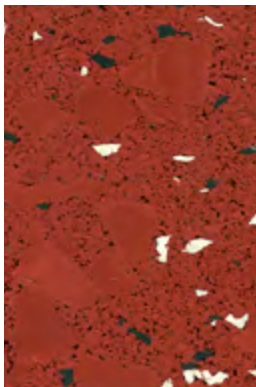

NTRL 1010

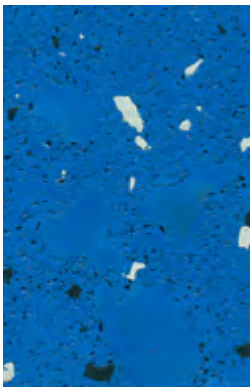


NTRL 1011

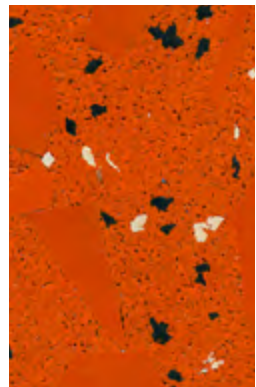


NTRL 1012



NTRL 1013

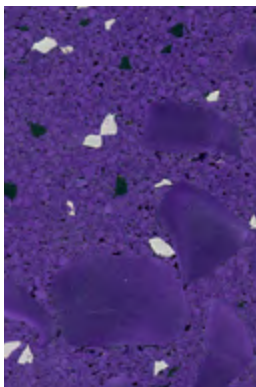

NTRL 1014

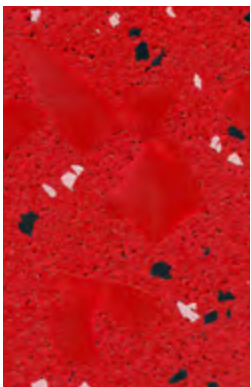

NTRL 1015



NTRL 1016

**Our Standard Colors**  
For real samples, contact us!