



REPHOUSE
www.rephouse.com



Neo flex™

**Fitness & Weight Room
Rubber Surfacing**

Tough Stuff


Neoflex™ is a perfect choice for the most demanding of resilient flooring conditions. Since its introduction, Neoflex™ has satisfied customers around the world for a host of fitness centres and weight rooms. It is durable enough to withstand constant abuse and wear while providing comfort and safety under foot.

Innovative Flooring

Neoflex™ stands out as an innovative, aesthetic and environmentally friendly choice among architects and interior designers. It is available in popular standard colours.

Durability & Comfort

Neoflex™ is tough because it is made in such a way as to be nearly indestructible under the most severe service conditions. Made of the highest quality synthetic and recycled rubber, Neoflex™ has an international reputation for durability, resilience, safety, comfort and design appeal. The single-ply, high-density sheet flooring will not delaminate. The appearance is evocative of terrazzo style flooring, but its sound insulation qualities are remarkable. You can count on Neoflex™ for many years of trouble free use.

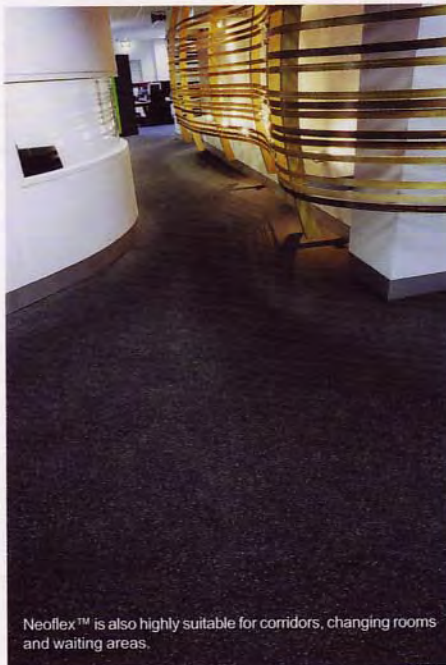

Neoflex™ is also highly suitable for corridors, changing rooms and waiting areas.


Neoflex™ 500 Series TECHNICAL SPECIFICATIONS

Density	±1,000 kg/m ³
Material	Polymerically bound recycled and synthetic rubbers
Thickness	6 mm, 8 mm, 10 mm
Roll length/width	10 m / 20 m and 1.2 m
Tile size	508 mm x 508 mm or 608 mm x 608 mm
Tensile Strength	1.39 N/mm ²
Tear Strength	9.7 N/mm ²
Resilience	49%
Shore A Hardness	60
Noise Absorption	18 dB (10 mm)
Flammability	DIN 51960 class 1

Neoflex™ High Impact Rubber Tiles

Neoflex™ High Impact Rubber Tiles provide ideal protection and safety for use in the heaviest use areas of weight and equipment rooms. Available in 3 x standard thickness to match the intended use, the tiles provide superior shock and sound absorption in free weight areas. When using Neoflex™ High Impact Rubber Tiles, the underfloor is protected from indentation or other damage due to repeated impact.

SIZES: 505 mm x 505 mm, 605 mm x 605 mm or 1010 mm x 1010 mm
THICKNESS: 15 mm, 20 mm and 25 mm
COLOURS: Black, pigmented red or green

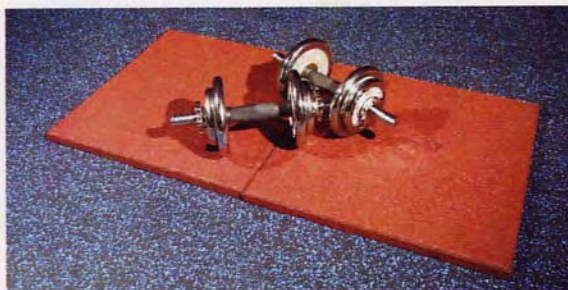


Installation





Neoflex™ is fully adhered to a sound, clean substrate with our recommended adhesive. Best results are obtained when experienced flooring technicians perform the product installation. A complete guide is available upon request.

QUICK REFERENCE DIMENSIONS

ROLLS

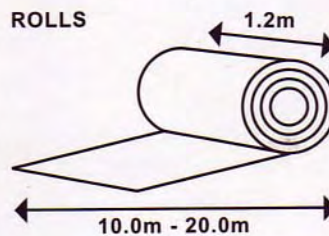

TILES

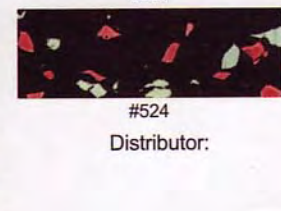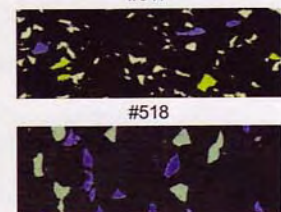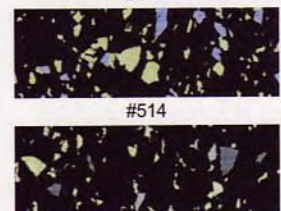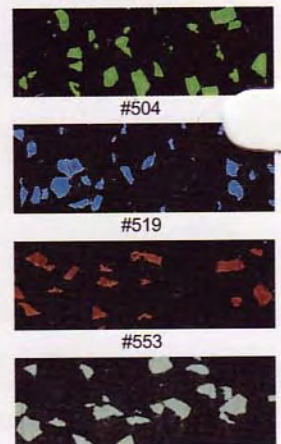

Distributor:

POPULAR COLOURS

OTHER STANDARD COLOURS