

INNOVATIVE
RUBBER
FLOORING
PRODUCTS



PLAY TILES



ATHLETICS




FITNESS



SPORTS




COMMERCIAL

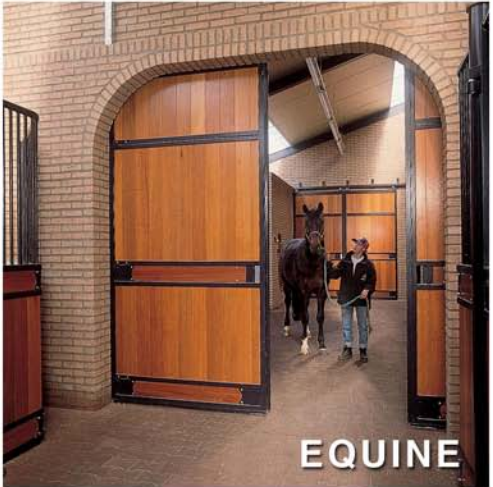

EQUINE

> INTRODUCTION

Since 1985, Rephouse has been manufacturing rubber flooring systems. This passion is still intact to this day and every floor supplied has been designed and built to last. Our mission is total quality, supported by the dedication of our experienced people. Our reputation rests on a steadfast pursuit in the development of rubber flooring systems for recreational, architectural and commercial applications.

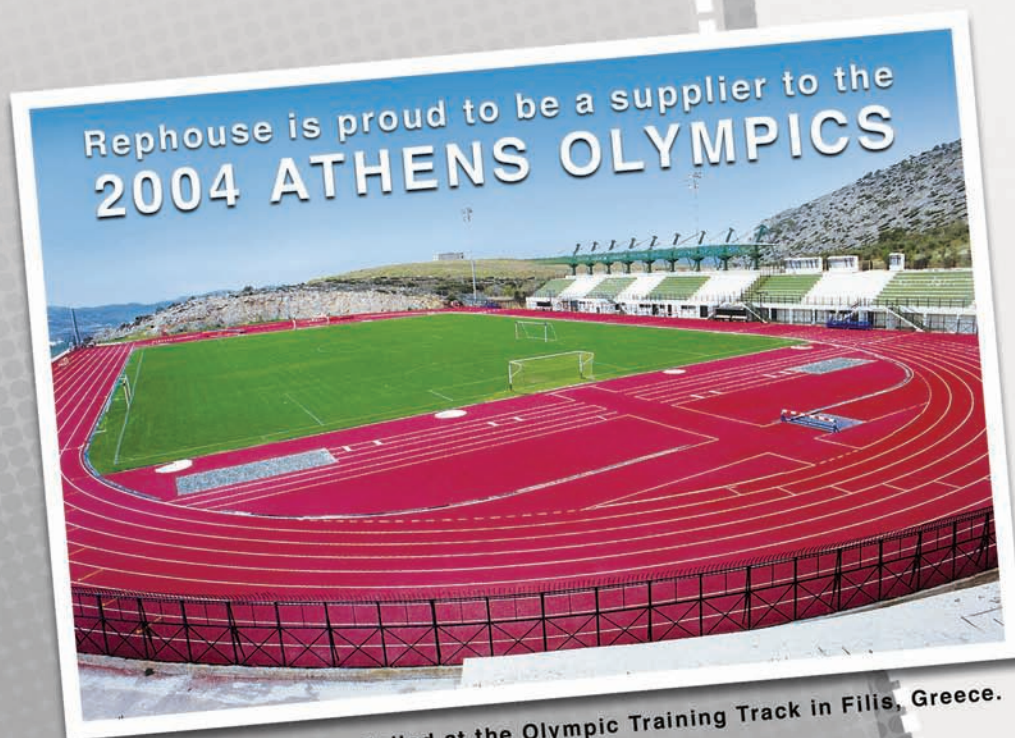

Decoflex™ SW14 is installed at the Olympic Training Track in Filis, Greece.



> RECYCLING

Rephouse collects tire waste and recycles it to combine with synthetic rubbers and polyurethanes and make new viable flooring products. Millions of square meters of flooring product has been produced to date. All flooring products supplied are fully recyclable themselves.



A) Rubber tire buffings



B) Rubber chips

C) Colored rubber chips

D) New products




> OUTDOOR : DECOFLEX™ 'D' SERIES



DECOFLEX 'D' SERIES is a prefabricated rubber sports flooring system specifically engineered for all weather sports applications. It is a true multipurpose sports surface ideal for schools, clubs, colleges, universities and public facilities.

SUITABLE FOR:

- Futsal
- Tennis
- Basketball
- Volleyball
- Handball
- Badminton
- Street Courts
- Multipurpose Play Areas

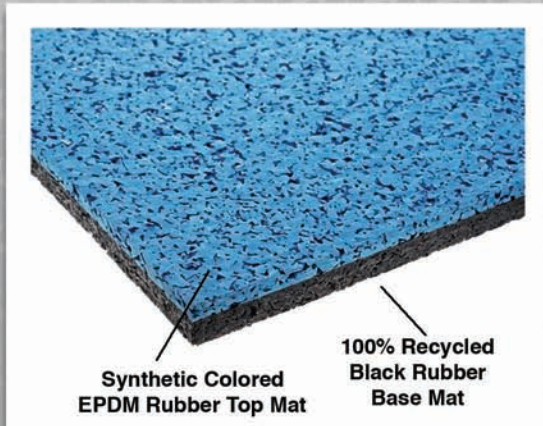

Synthetic Colored
EPDM Rubber Top Mat

100% Recycled
Black Rubber
Base Mat



Dimensions

Roll length: to suit job
Roll width: 1.2m [4']
Base Mat weight: 850 kg/m³ [53.0 lbs/ft³]
Top Mat weight: 1200 kg/m³ [74.8 lbs/ft³]


Thickness:

D6 - 6mm [1/4"]
D8 - 8mm [5/16"]
D10 - 10mm [3/8"]
D12 - 12mm [1/2"]



DECOFLEX™


STANDARD DECOFLEX™ COLORS



Gray




Lemon Yellow



Signal Green




Eggshell

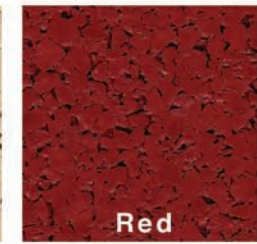


Red



Yellow




Blue Gray




Blue



Capri Blue

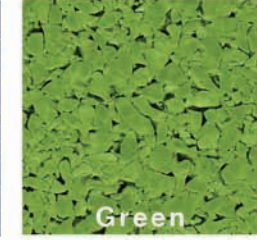

Green

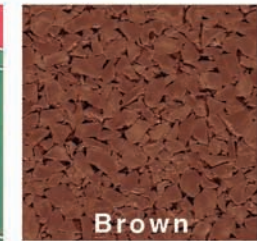

Brown



> INDOOR : DECOFLEX™ UNIVERSAL



DECOFLEX™ UNIVERSAL - the discerning sportsman will prefer the cushioned indoor seamless polyurethane Decoflex™ Universal Sports Floor because it is designed for the most demanding sports conditions. The surface is unique: by incorporating a resilient black rubber base mat that can be supplied in a different thickness, the Decoflex™ Universal Sports Floor can be optimized for just about any sport requirement. The superior quality of the Decoflex™ Universal Sports floor is not only appreciated in sports centers, the surface is also a great alternative as a resilient, sound absorbing multi use floor for dance halls, aerobic rooms, fitness centers, school halls and catering facilities.



SUITABLE FOR
Fieldhouses
Basketball
Volleyball
Aerobics
Dance Halls
Gyms



USSL
UNITED STATES
SPORTS SURFACING
LABORATORY, INC.




> INDOOR : DECOFLEX™ UNIVERSAL

Seamless Wear Coat

- applied in a single pour
- distributes point loads over larger area due to soft base mat

Pore Sealer

- thixotropic
- designed to seal the rubber base mat
- excellent compatibility with wear coat

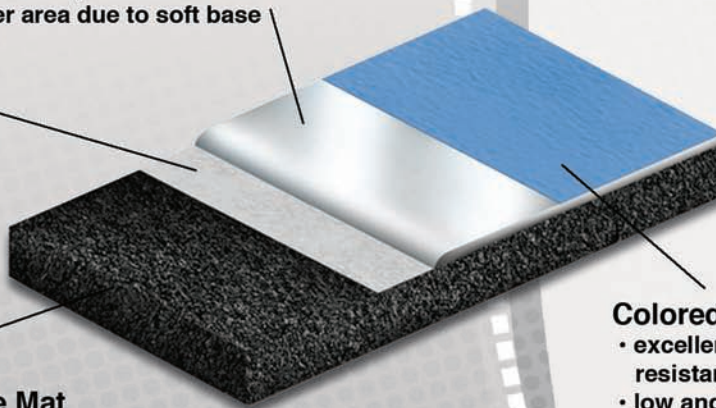

Colored Top Coat

- excellent abrasion & marring resistance
- low and easy maintenance

100% Recycled Rubber Base Mat

- consistent thickness for complete reliability
- excellent force reduction
- choice of thickness allows for sports optimization

Dimensions

Roll length: to suit job

Roll width: 1.2m [4']

Base Mat weight: 700 kg/m³ [43.6 lbs/ft³]

Thickness:

7mm [1/4"]

9mm [5/16"]

11mm [3/8"]

12mm [1/2"]

17mm [11/16"]



Standard Colors



RED



PASTEL BLUE



BLUE



CAPRI BLUE



LIGHT GREEN



MAY GREEN



LIGHT GRAY



GRAPHITE




ORANGE

> TRACK AND FIELD : DECOFLEX™




DECOFLEX™ SW14 is installed at the 2004 Athens Olympic Training Track in Filis, Greece.

SW14

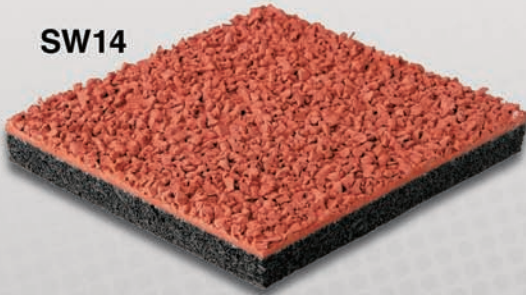


IAAF CERTIFIED

Prefabricated Black Rubber Base Mat
Polyurethane Pore Sealer
Polyurethane Wear Coat
Synthetic EPDM Rubber Granules
Thickness: 14mm

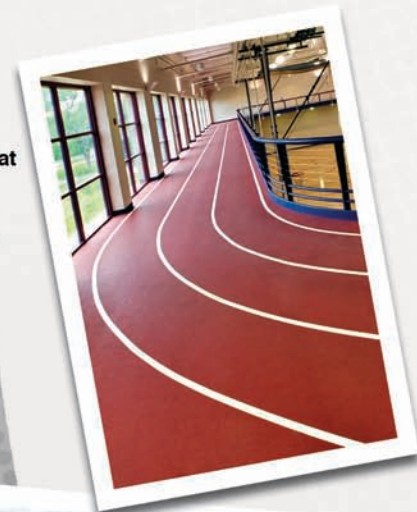

T14

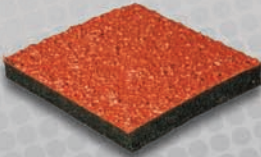


IAAF CERTIFIED

Prefabricated Black Rubber Base Mat
Polyurethane Pore Sealer
Spray Coat Texture
Thickness: 14mm



D14


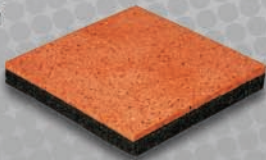


MEETS ALL IAAF
REQUIREMENTS

Prefabricated Black Rubber Base Mat
Prefabricated Colored Top Mat
Thickness: 14mm



Standard Colors



> COMMERCIAL : NEOFLEX™



Neoflex™ Rubber Flooring has excellent features to enhance the look, feel and life of your floor. Neoflex™ is an environmentally friendly, homogeneous EPDM/recycled rubber floor covering for areas subject to heavy wear. The durability, flexibility, safety, comfort, slip resistance and aesthetic appeal makes Neoflex™ the true perfect solution for both in - and outdoor flooring applications.

VERSATILE

Direction free rubber chips, in a variety of colors, allow for a wide variety of patterns and expand the designers' choice to express their creativity. Neoflex™ brings a large range of designs and colors making it easy and efficient to design rubber flooring.


DURABLE

With a five (5) year limited warranty, Neoflex™ is made to last the life of the application without cracking or breaking. Neoflex™ can be installed in areas of heavy foot traffic where the product will last for the intended life of the building.



SOUND ABSORBENT

The use of highly flexible compounds ensures a high level of noise abatement, thus creating a quiet environment.



NEOFLEX™

> COMMERCIAL : NEOFLEX™



SAFE

Safety is the number one concern of commercial applications. With Neoflex™ you are compliant and the excellent performance in slip resistance, fire behavior and smoke emission, assures the safety in the workplace and public areas. All products are made with raw materials that are not known to pose any hazard to the environment and to the people during manufacturing and handling process; free of asbestos, free of halogens, free of PVC.

FLEXIBLE, RESILIENT & ANTI-FATIGUE

Flexibility and permanent resilience are the main features of Neoflex™. By using the highest quality rubbers and compounds, this feature is maintained throughout its useful life offering a very high degree of comfort under-foot and anti-fatigue effect. This is particularly important for those application where people are standing on their feet while performing their jobs (offices, transit areas, waiting rooms, restaurants, bars, shopping malls, etc).

ECONOMICAL

There is no question that Neoflex™ is the most economical due to its long life and low maintenance.



> COMMERCIAL : NEOFLEX™



EASY MAINTENANCE

Neoflex™ is finished with Rephouse's proprietary polyurethane coating, FRESH FINISH™ and is thus easily cleaned using conventional cleaning agents.



ANTI MICROBIAL


Neoflex™ contains a microbial treatment which ensures freshness at all times.

ENVIRONMENTALLY FRIENDLY

Neoflex™ contains a high percentage of recycled rubber and contains no substances that harm the environment. It is halogen free, formaldehyde free and PVC free. Neoflex™ itself can be fully recycled and does not generate toxic substances at the end of its life.



> NEOFLEX™ : 500 SERIES

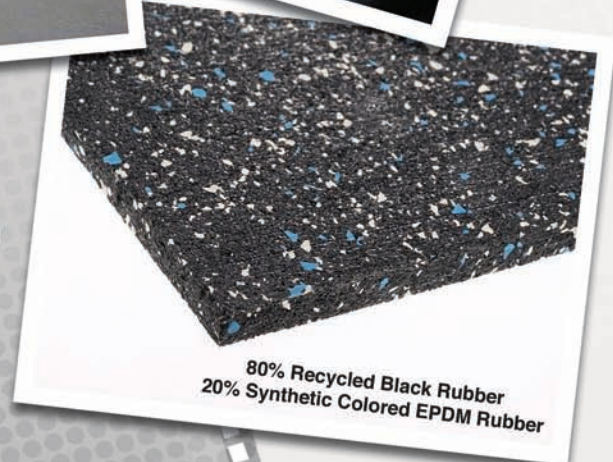

AREAS OF APPLICATION
 Fitness Gyms / Aerobics
 Changing Rooms / Pools
 Building / Entrances / Retail
 Auditoria / Corridors
 Stadia / Cinemas
 Buses / Trains

80% Recycled Black Rubber
 20% Synthetic Colored EPDM Rubber




501



502



503




504



505



513



516



519



524



525



553



554

GREAT FEATURES

- Slip Resistant (exceeds ADA requirements)
- Homogenous Construction
- Resilient, Durable, Low Step Noise
- Environmentally Friendly
- Microbial Treated
- Optional Fresh Finish™
- Sealer Available
- ASTM D2859 CLASS 1 Flammability



> NEOFLEX™ : 600 SERIES



AREAS OF APPLICATION
 Offices / Healthcare Facilities
 Educational Facilities / Retail
 Institutional Facilities / Washrooms
 Walkways / Building Entrances
 Auditoria / Corridors / Stadia / Cinemas
 Buses / Trains / Fitness Gyms / Aerobics
 Changing Rooms / Pool Surroundings

5% Recycled Black Rubber
 95% Synthetic Colored EPDM Rubber




603




604




621




629



633



636



637




642




651



657



658



675



676

GREAT FEATURES
 Slip Resistant (exceeds ADA requirements)
 Homogenous Construction
 Resilient, Durable, Low Step Noise
 Environmentally Friendly
 Microbial Treated
 Optional Fresh Finish™
 Sealer Available
 ASTM E648 CLASS 1 Flammability



USSL
 UNITED STATES
 SPORTS SURFACING
 LABORATORY, INC.



iHRSA
 International Rubber & Synthetic Rubber Association

> NEOFLEX™ : 700 SERIES

Neoflex™
RESILIENT FLOORING




AREAS OF APPLICATION
 Offices / Healthcare Facilities
 Educational Facilities / Retail
 Institutional Facilities / Washrooms
 Walkways / Building Entrances
 Auditoria / Corridors / Stadia / Cinemas
 Buses / Trains / Fitness Gyms / Aerobics
 Changing Rooms / Pool Surroundings



30% Recycled Black Rubber
 70% Synthetic Colored EPDM Rubber



711



720




735



737



742



744



747



749



750



775



782



783

GREAT FEATURES
 Slip Resistant (exceeds ADA requirements)
 Homogenous Construction
 Resilient, Durable, Low Step Noise
 Environmentally Friendly
 Microbial Treated
 Optional Fresh Finish™
 Sealer Available
 ASTM E648 CLASS 1 Flammability



USSL
 UNITED STATES
 SPORTS SURFACING
 LABORATORY, INC.




> NEOFLEX™ : 800 SERIES




- AREAS OF APPLICATION**
- Offices / Healthcare Facilities
 - Educational Facilities / Retail
 - Institutional Facilities / Washrooms
 - Walkways / Building Entrances
 - Auditoria / Corridors / Stadia / Cinemas
 - Buses / Trains / Fitness Gyms
 - Aerobics
 - Changing Rooms
 - Pool Surroundings

- GREAT FEATURES**
- Slip Resistant (exceeds ADA requirements)
 - Homogenous Construction
 - Resilient, Durable, Low Step Noise
 - Environmentally Friendly
 - Microbial Treated
 - Optional Fresh Finish™
 - Sealer Available
 - ASTM E648 CLASS 1 Flammability




801



802




803



804




805




806




807



808




809




810



811



812




813



814



815




816



817



818



819




820

> NEOFLEX™ : BFC SERIES

Neoflex™ Rubber Flooring is also supplied in a BFC format using large colored EPDM chips as a dynamic architectural feature for your floor. Have a look below at the BFC versions of a typical 500, 600 and 700 Series floor. For more information, call or ask for samples.



506-BFC

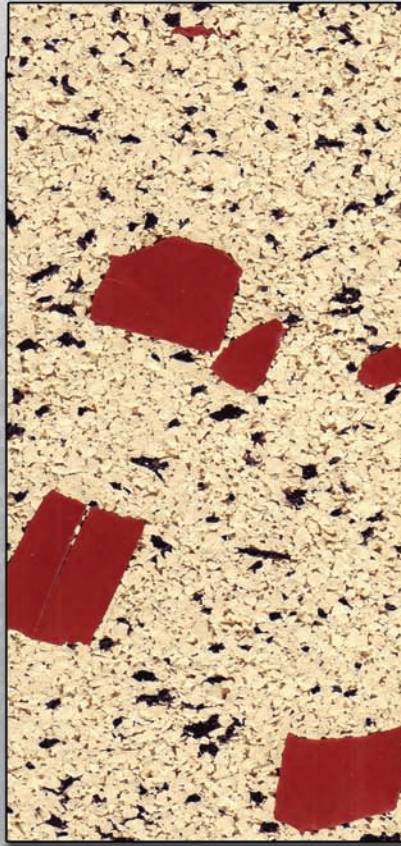

629-BFC



740-BFC

> PLAY : PLAYFLEX™ SAFETY TILES



GREAT FEATURES

Certified to ASTM F1292 / EN 1177 / AS/NZS 1422
 Slip Resistant (exceeds ADA requirements)
 Homogenous Construction
 Resilient, Durable, Low Step Noise
 Environmentally Friendly
 Microbial Treated
 Made of Recycled Rubber



USSL
 UNITED STATES
 SPORTS SURFACING
 LABORATORY, INC.



BASIC - made of Recycled Rubber + Pigmented Binder



ROYAL - made of a poured colored Synthetic EPDM Rubber Top and Recycled Rubber Base



DESIGNER - made of a 100% colored Synthetic EPDM Sheet Rubber Top and Recycled Rubber Base



JAZZ - made of a blend of colored Synthetic EPDM + Black Sheet Top and Recycled Rubber Base



GALAXY - made of Recycled Rubber with a Flecked Colored Synthetic EPDM Top

Tiles: 508mm x 508mm [20" x 20"] or 608mm x 608mm [24" x 24"] or 1010mm x 1010mm [40" x 40"]
 Thickness: 15mm [9/16"] to 100mm [4"]

PLAYFLEX™

> VERSATILE™ RUBBER TILES



Versatile™ resilient modular recycled rubber safety flooring is a terrific alternative to traditional hard surfaces. Patterns provide unique finish and styling. Versatile™ is tough, flexible, slip resistant and comfortable to walk on.



GREAT FEATURES

Slip Resistant (exceeds ADA requirements)
 Homogenous Construction Resilient,
 Durable, Low Step Noise,
 Environmentally Friendly,
 Made of Recycled Rubber



USSL
 UNITED STATES
 SPORTS SURFACING
 LABORATORY, INC.

EPT - 32
 1130 x 900mm
 [44 1/2" x 35 4/10"]

Thickness:
 15mm [9/16"]
 20mm [7/8"]
 25mm [1"]
 45mm [1 3/4"]

BRT
 505 x 505mm
 [20" x 20"]


FST
 505 x 505mm
 [20" x 20"]

FXT
 505 x 505mm
 [20" x 20"]

HXT
 608 x 550mm
 [24" x 21 5/8"]

ZXT
 555 x 555mm
 [21 7/8" x 21 7/8"]

EPT
 845 x 600mm
 [33 1/4" x 23 5/8"]

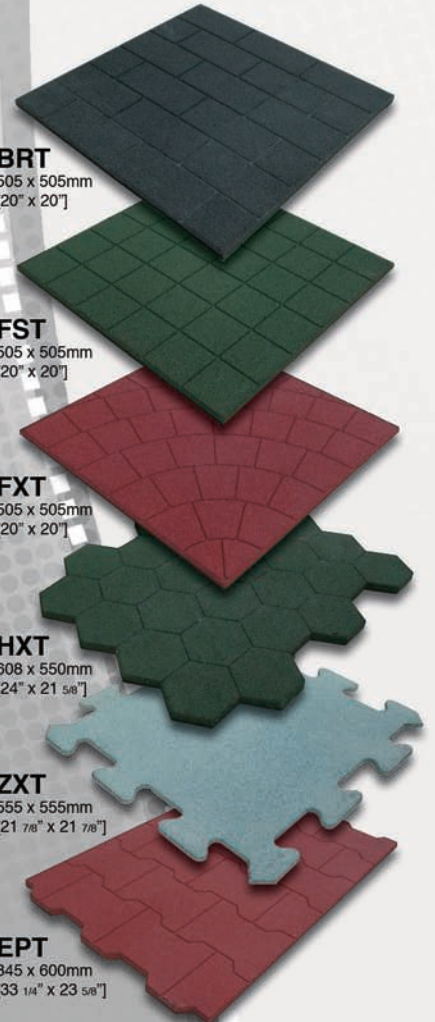

> EQUINE : EVOPAWE™




Rubber Interlocking Pavers are ideal as a resilient safe equine flooring. As supplied to the 2004 Athens Olympics.



GREAT FEATURES

Slip Resistant (exceeds ADA requirements)
Homogenous Construction Resilient,
Durable, Low Step Noise,
Environmentally Friendly,
Made of Recycled Rubber

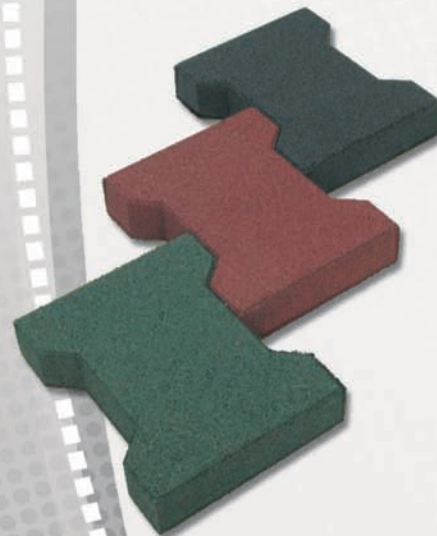

Try them for commercial entrances, golf clubs, weight rooms, ski lodges, amusement parks, garden centers and recreational areas.

Dimensions

Length: 200mm [8"]
Width: 160mm [6 11/32"]

Thickness:
15mm [9/16"]
20mm [7/8"]
25mm [1"]
45mm [1 3/4"]



USSL
UNITED STATES
SPORTS SURFACING
LABORATORY, INC.



EVOPAWE™

> INDUSTRIAL : ISODEC™



Isodec™ is a premium accoustical underlayment which provides optimum sound and vibration resonance absorption as well as excellent thermal insulation properties. It is manufactured of polymetrically bound recycled rubber and/or cork particles and is supplied in rolls that are easy to handle and install.



B700-BA - 100% Recycled Rubber



RC-500 - Combination of Recycled Rubber and Cork



FEATURES

- Reduces Noise Transfer > 50%
- Reduce Step Noise
- Environmentally Friendly
- Quick Installation
- Permanently Resilient





NORTH AMERICA

Rehouse America
T: +1 866 898 8007
F: +1 519 821 6694

E: sales-america@rehouse.com

EUROPE

Rehouse Europe
T: +31 78 699 55 00
F: +31 78 691 42 00

E: sales-europe@rehouse.com

ASIA/MIDDLE EAST

Rehouse Malaysia
T: +60 3 6028 5388
F: +60 3 6028 5688

E: info@rehouse.com

AUSTRALIA

Rehouse Australia
T: +61 7 3281 0088
F: +61 7 3281 0099

E: tony.newton@rehouse.com