



Play safe.

Playflex[™] Rubber Safety Tiles

- Safety surfacing to cushion falls and reduce the risk of injuries
- Prefabricated modular rubber tiles supplied from 15mm to 105mm in thickness
- Tested for Critical Fall Height to European and American Standards
- Cost effective with different styles for different budgets
 - Basic
 - Basic+
 - Galaxy
 - Royal
 - Designer
 - Jazz
- Different Models
 - CBI Base for hard sub-surface
 - ** Improved Critical Fall Heights**
 - NMP Base for hard or soft sub-surface
 - installed using plastic connectors








Playflex Safety Tiles

Playflex™ Graphics

- Playflex[™] Graphics are supplied as modular tiles •
- Each tile is custom-made based on an electronic drawing, and • precision cut to within a fraction of a millimeter
- Complexity of installation removed because Rephouse labels and • organizes each individual tile
- The installation process is as simple as following our instructions, • and installing tiles in sequence

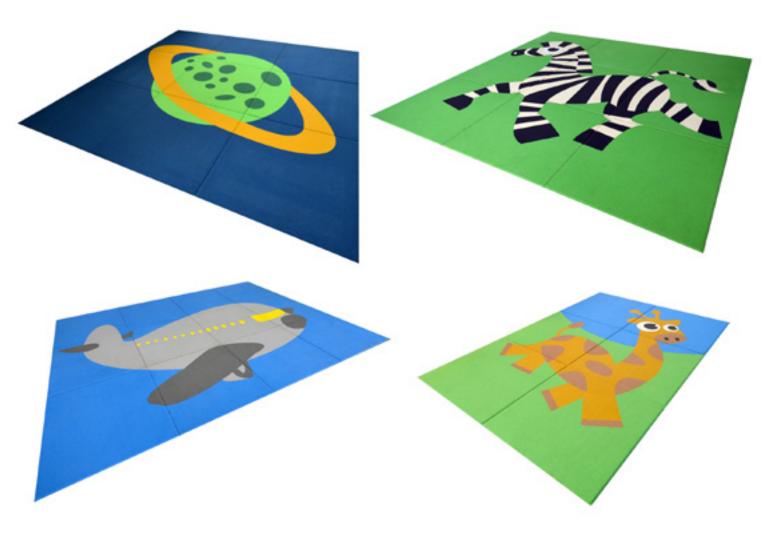








Free Fall Tester

ASTM F1292 & EN 1177 Standards



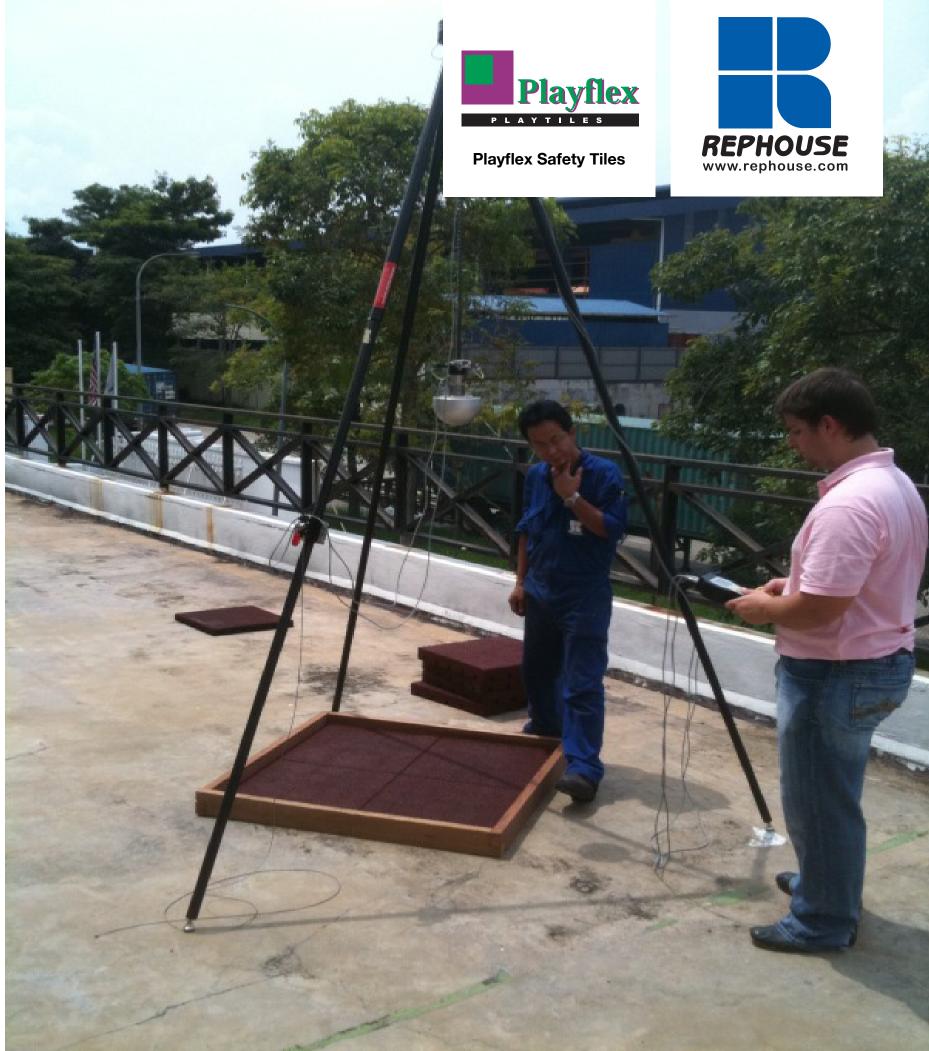





For the sake of better performance, we've dispensed with a lot - a lot of weight.

Playflex[™] CBI Rubber Safety Tiles

- Computer designed and engineered
- Methodically evaluated and tested
- Designed for material and adhesive savings
- High compression molding for extra durability
- 505mm x 505mm tile size
- 45mm to 105mm thickness available

CBI Play Tile	Critical Fall Height EN 1177:2008	Critical Fall Height ASTM F1292:2008
45 mm (1 3/4")	1.3 m	3'
50 mm (2")	1.7 m	5'
65 mm (2 1/2")	2.1 m	6'
85 mm (3 1/3")	2.7 m	8'
105 mm (4 1/8")	3.3 m	11'













Playflex CBI Tiles

18 100

.







Playflex CBI Tiles













Playflex CBI Tiles



Simple savings.

PU87 1-Part Polyurethane Adhesive

- moisture-cured
- high grab strength, tenacious bond
- no mixing
- suitable for indoor and outdoor
- compatible for use with Automated Dispensing Unit (ADU-5)
- potential for up to 50% material savings
- will also be available in 858ml cartridges










PU87

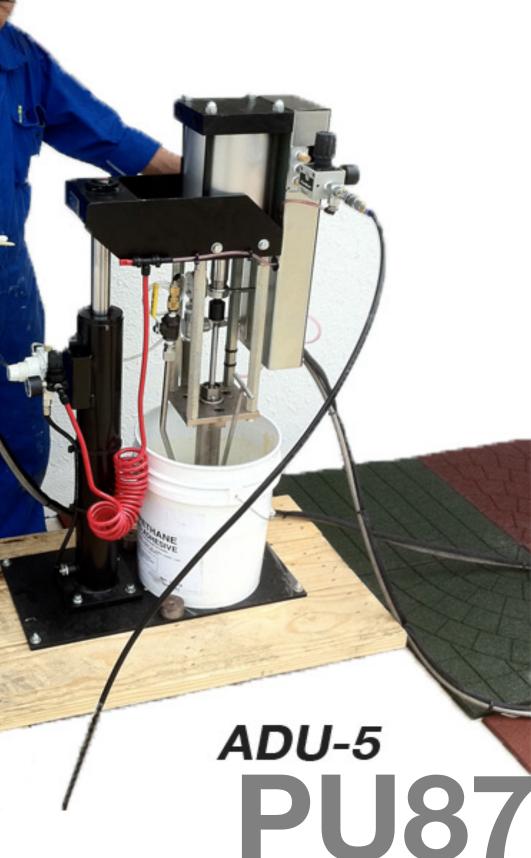

For safety on soft subsurfaces.

Playflex[™] NMP Rubber Safety Tiles

- Designed for use on crushed gravel or compacted sand sub-surfaces
- Installed using plastic pin connectors
- Adhesive not required
- 505mm x 505mm tile size
- 45mm to 90mm thickness available

NMP Play Tile	Critical Fall Height EN 1177:2000	Critical Fall Height ASTM F1292
45 mm (1 3/4")	1.4 m	4'
75 mm (3")	2.0 m	Not Tested
90 mm (3 1/2")	2.7 m	Not Tested















23

2

常語要傷放應是從自

15.280 5 2.53 -15.280 5 2.53 -14.210 5 8 2 -5.085 5 3 4

18月-月留舟屋金

.

Playflex NMP Tiles





Playflex NMP Tiles




A variety of choices.

Playflex[™] Colors & Styles

Specifically engineered to suit budgets, design requirements and usage expectations

Basic - made of black recycled rubber, colored with a pigmented MDI polyure thane binder.








Basic+ - made of black recycled rubber, colored with a liquid rubber coating.






Green





Earth Yellow

Galaxy - made of black recycled rubber, colored with sprinkled EPDM rubber granules, all bound by a clear MDI










Farth Yellow

Royal - made of a black recycled rubber base, covered with a colored EPDM rubber top layer, all bound by a clear

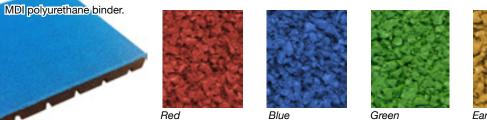




Earth Yellow









Basic - made of black recycled rubber, colored with a pigmented MDI polyurethane binder.

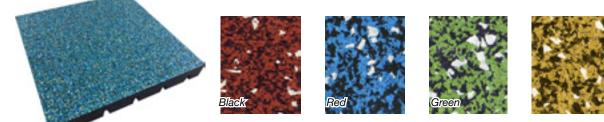


Basic+- made of black recycled rubber, colored with a liquid rubber coating.

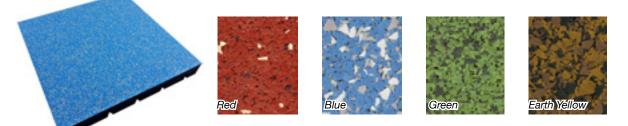

Galaxy =made of black recycled rubber, colored with sprinkled EPDM rubber granules, all bound by a clear MDI polyurethane binder.



• Many more colors available

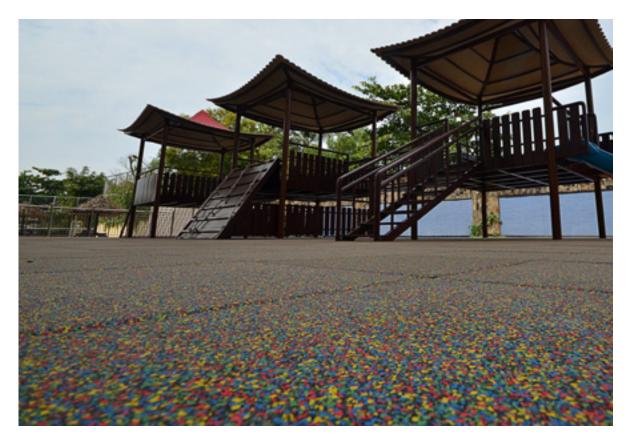





Playflex Colors & Styles

