

Neo *flex*™

RESILIENT FLOORING

for Commercial

The premium choice.


Neoflex™ 600 Series

- 100% Synthetic Colored EPDM Rubber
- Very durable resilient flooring solution
- Very chemically resistant
- No smell
- Compliant to ASTM E648, Class 1
Complaint to EN 13501, Cfl-s1

Neoflex #604
Suncorp Group Corporate Offices
Sydney, Australia



Neoflex 600 Series



REPHOUSE
www.rephouse.com


600 SERIES

Standard Colors.

Neoflex™ 600 Series.



Neoflex 600 Series




REPHOUSE
www.rephouse.com




603




604

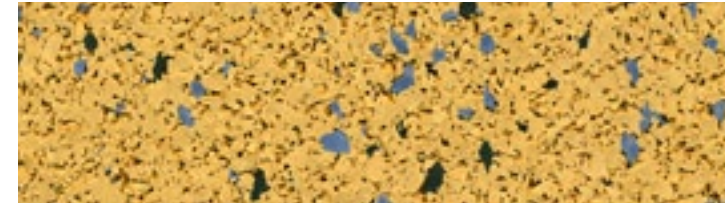


609

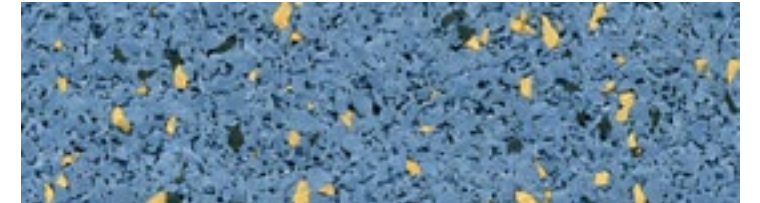


611

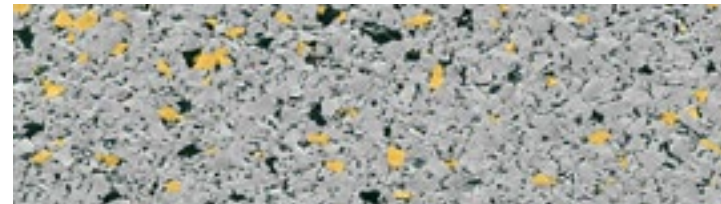

621

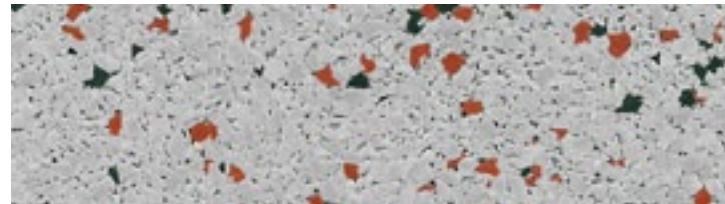

623

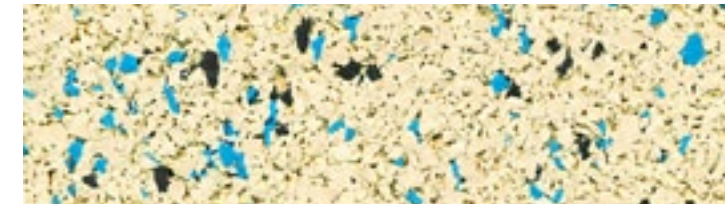


628




629




633

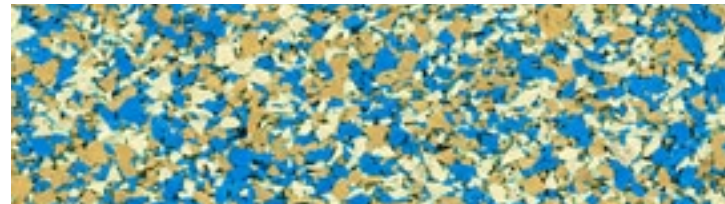

634

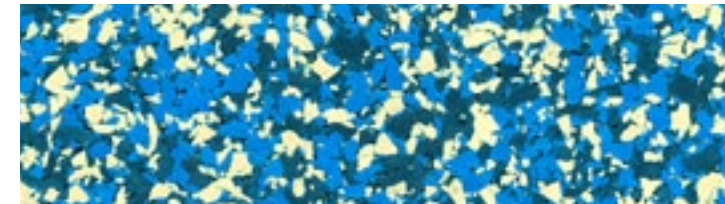


635

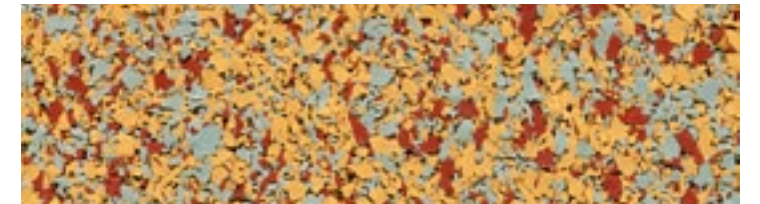


636



665

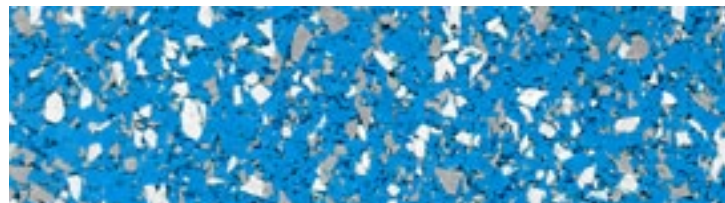

675

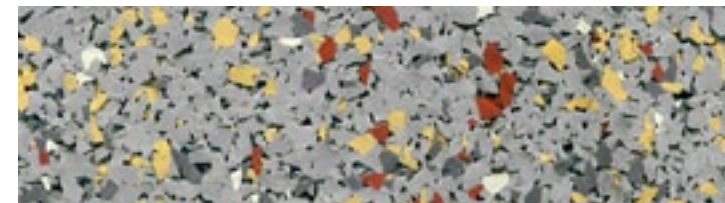

696


20 New Standard Colors.

Neoflex™ 600 Series - New Colors

- chosen by architects and designers



Neoflex 600 Series




REPHOUSE
www.rephouse.com




600-001



600-002

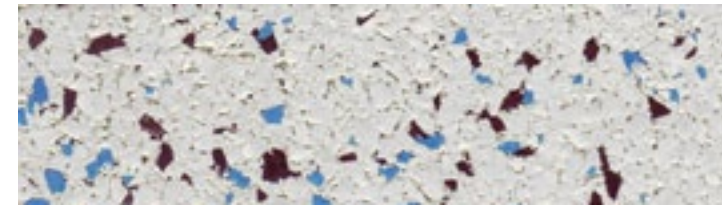

600-003

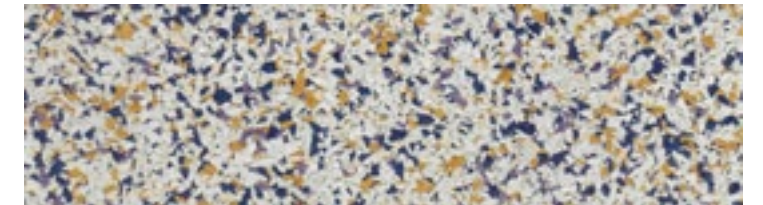

600-004




600-005



600-006




600-007

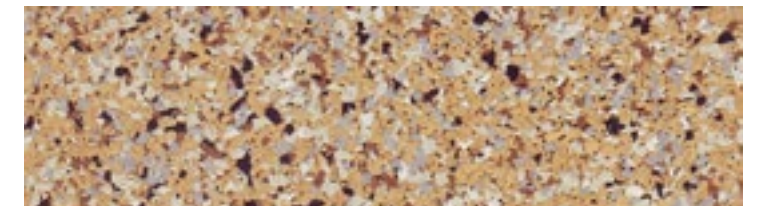


600-008




600-009

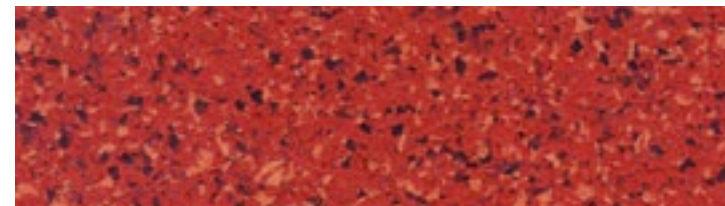

600-010

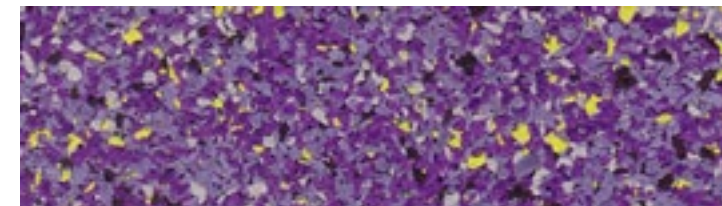

600-011

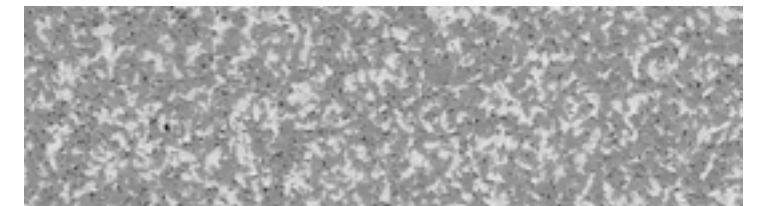


600-012




600-013




600-014

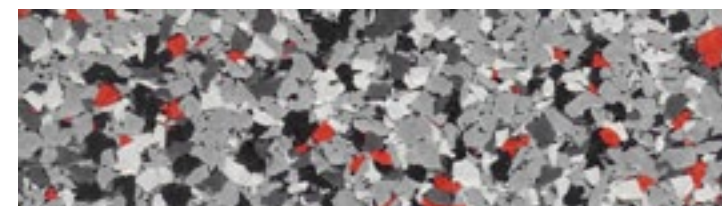


600-015

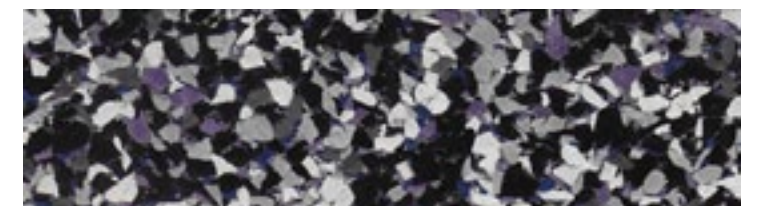


600-016

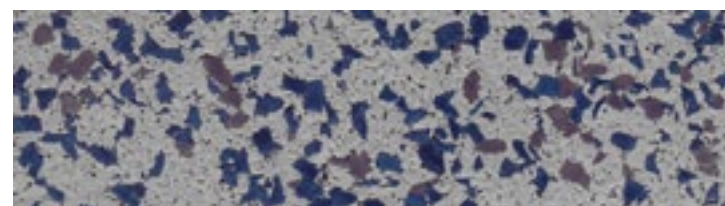


600-017

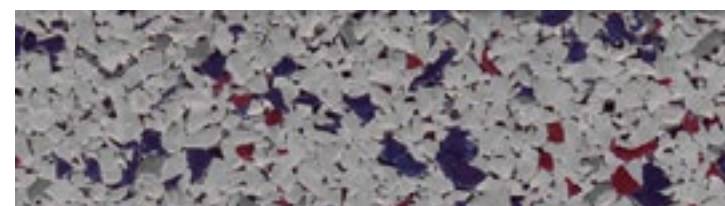

600-018

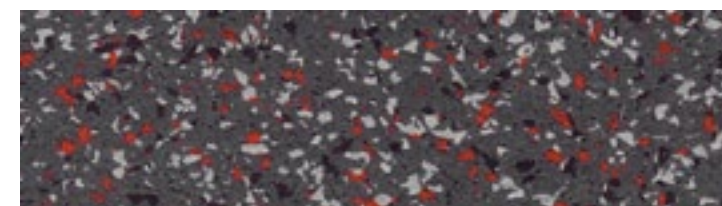

600-019

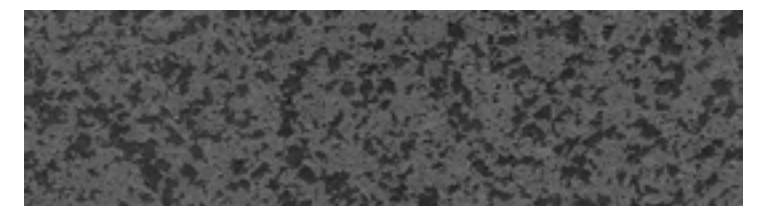

600-020



Neoflex™
RESILIENT FLOORING
Neoflex 600 Series

REHOUSE
www.rehouse.com


VISION FITNESS
X70
JOHN-VEP0121-00
AED 14,595

INFO

INFO



Neoflex 600 Series



REHOUSE
www.rehouse.com

Neoflex #600 Series - Custom Color
Alblasserdam Public Library
Alblasserdam, The Netherlands



Neo flex™
RESILIENT FLOORING

Neoflex 600 Series



REHOUSE
www.rehouse.com

Neoflex #600 Series - Custom Color
Coornhert Lyceum School
Haarlem, The Netherlands

The beautiful balance.


Neoflex™ 700 Series

- 70% Synthetic Colored EPDM Rubber
30% Recycled EPDM Rubber
- 100% synthetic EPDM rubber flooring solution
- Very chemically resistant
- No smell
- Compliant to ASTM E648, Class 1
Complaint to EN 13501, Cfl-s1
- More affordable than Neoflex™ 600 Series

Neoflex #778 & #783
Adidas Superstore
Herzogenaurach, Germany



Neoflex 700 Series



REPHOUSE
www.rephouse.com




700 SERIES

Standard Colors.

Neoflex™ 700 Series.




Neoflex 700 Series




REPHOUSE
www.rephouse.com




701

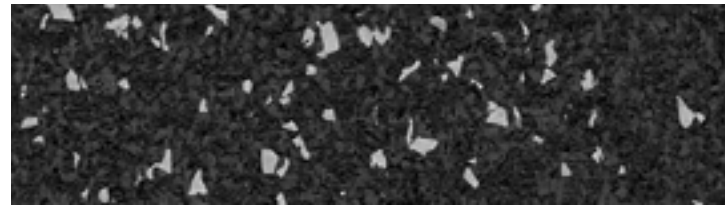

702

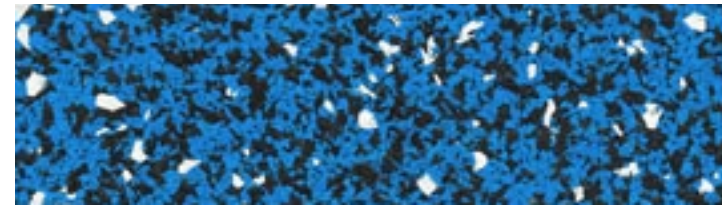


707

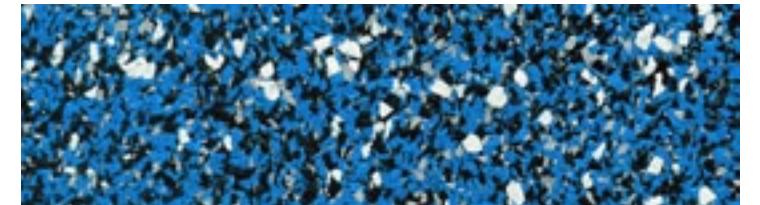


711




716

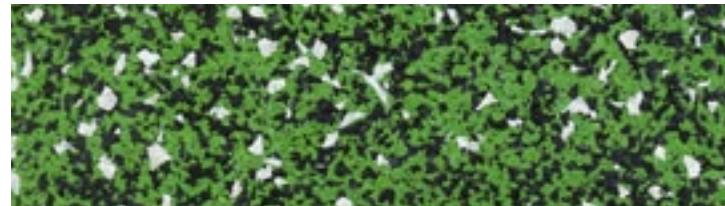


720

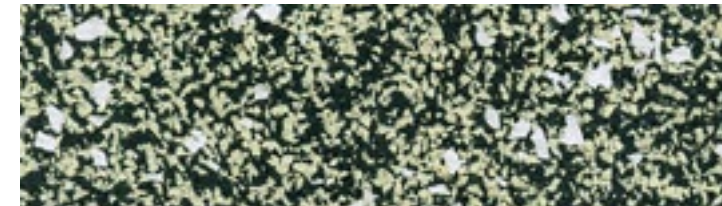

723

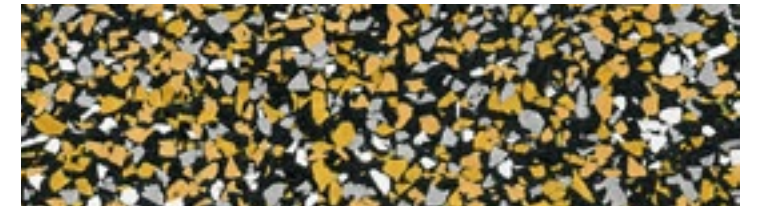


736

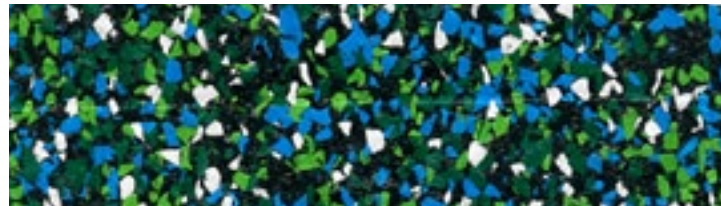


740



742

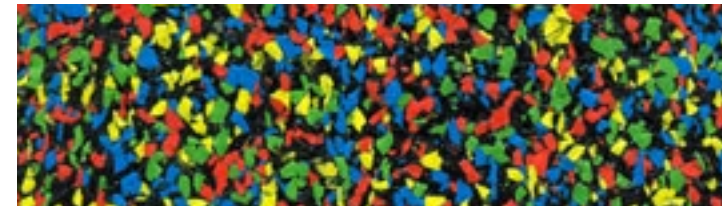

744

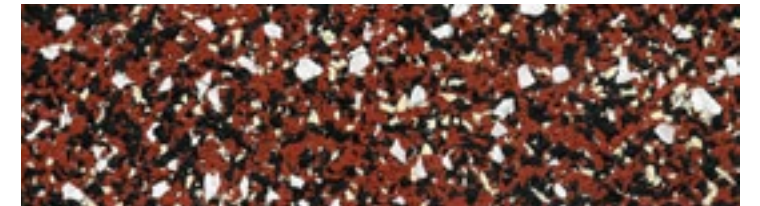


748



749




750

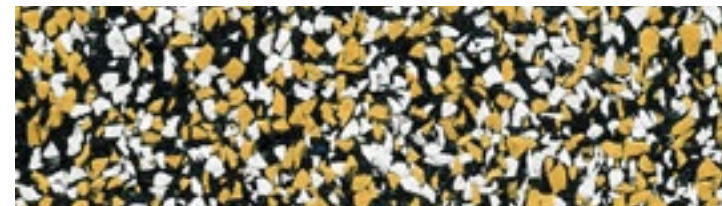


754



768

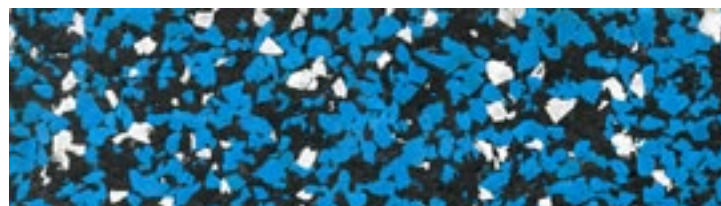

776

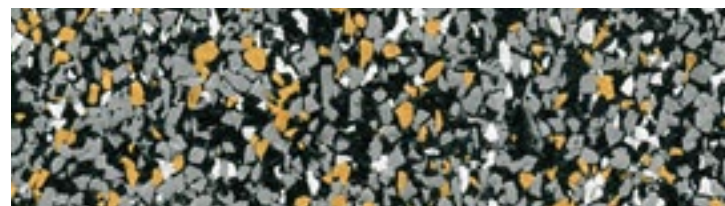


782

... and many, many more.


10 New Standard Colors.

Neoflex™ 700 Series Colors


- chosen by architects and designers

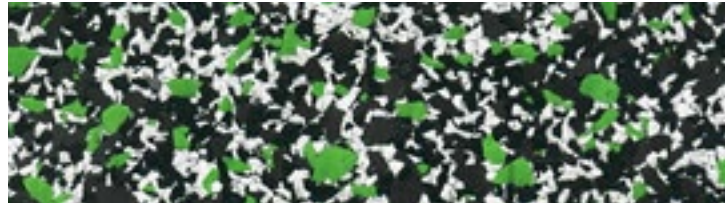

700-001

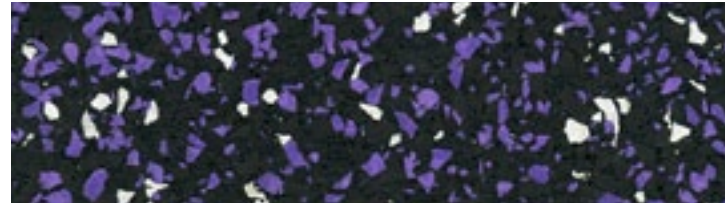

700-002

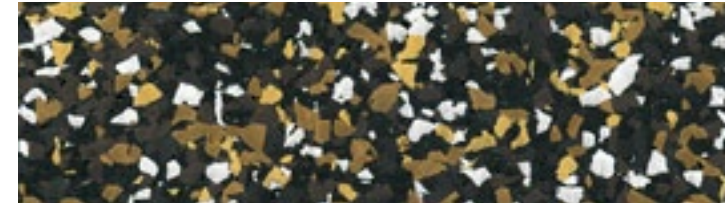

700-003




700-004




700-005




700-006

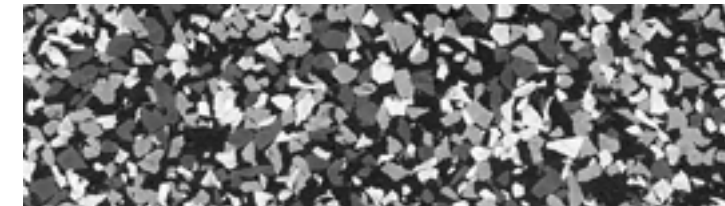


700-007

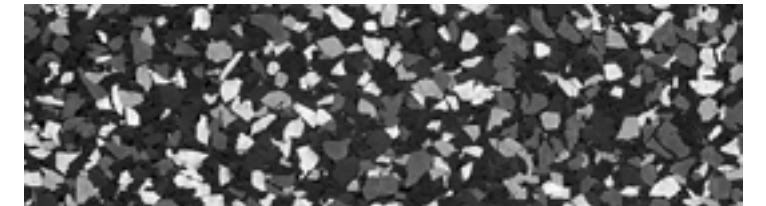

700-008

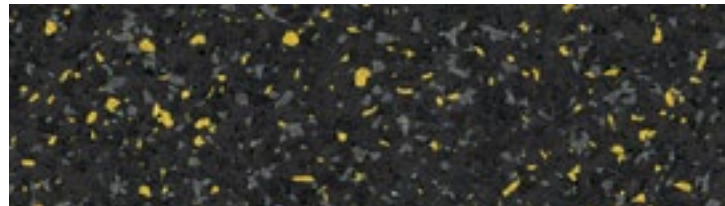

700-009

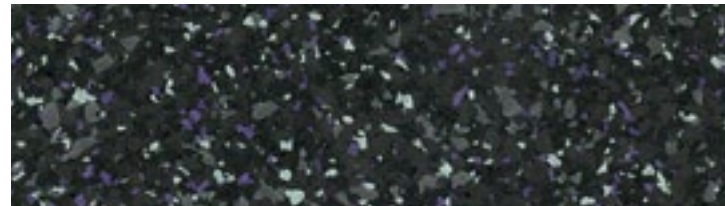


700-010



Neoflex #723
Hassell Architects
Sydney, Australia




Neoflex 700 Series



REPHOUSE
www.rephouse.com



Neoflex 700 Series



REPHOUSE
www.rephouse.com

The monolithic choice.


Neoflex™ 800 Series

- 100% Synthetic Colored EPDM Rubber
- 20 solid EPDM colors
- Very chemically resistant
- No smell
- Compliant to ASTM E648, Class 1
Complaint to EN 13501, Cfl-s1
- suited for:
 - trimmings
 - edges
 - borders
 - logos

Neoflex #805
Mercedes-Benz Daimler Chrysler RAI Exhibition
Amsterdam, The Netherlands



Neoflex 800 Series




REPHOUSE
www.rephouse.com



800 SERIES

20 Standard Colors.

Neoflex™ 800 Series.

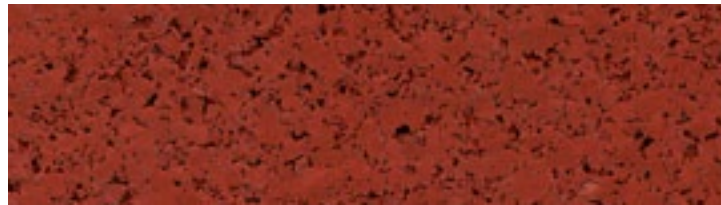

801




802




803




804

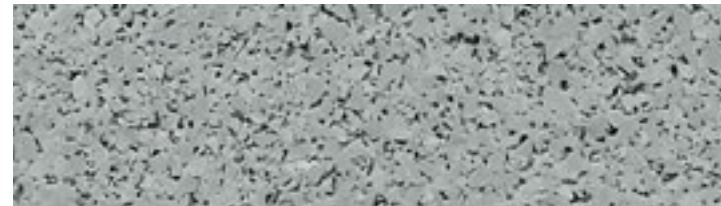


805

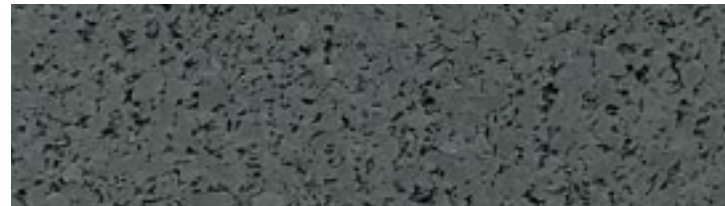


806

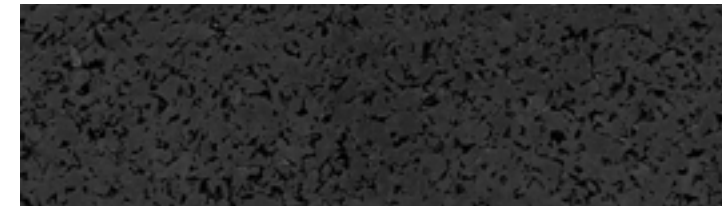

807

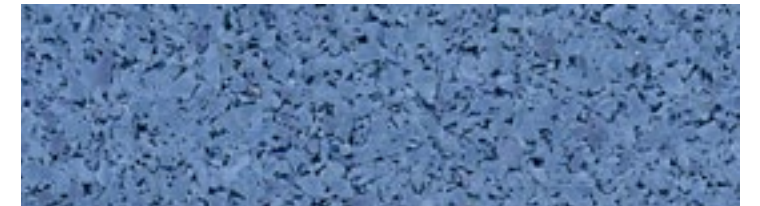

808

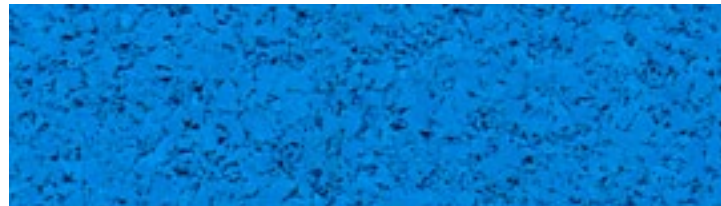

809




810



811



812

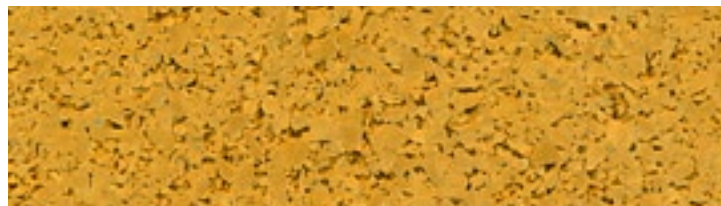

813



814



815




816



817



818

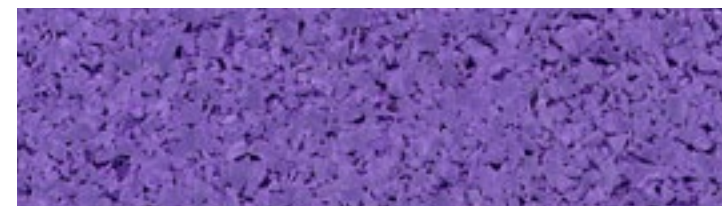

819



820



Neoflex™
RESILIENT FLOORING
Neoflex 800 Series




REPHOUSE
www.rephouse.com

Neoflex #819
Mars Restaurant
Mumbai, India



Neoflex 800 Series




REPHOUSE
www.rephouse.com

Neoflex #810
Coornhert Lyceum School
Haarlem, The Netherlands



Neoflex™
RESILIENT FLOORING
Neoflex 800 Series




REPHOUSE
www.rephouse.com

Neoflex #804, #809, #810, #811, #814, #819 & #820
Oberois International School
India



Neoflex™
RESILIENT FLOORING

Neoflex 800 Series



REPHOUSE
www.rephouse.com

The natural choice.


Neoflex™ NTRL Series

- 100% Synthetic Colored EPDM Rubber
- Different sized granulate
- Textured aesthetic with very high density
- Very chemically resistant
- No smell
- Compliant to ASTM E648, Class 1
Complaint to EN 13501, Cfl-s1
- Highest density Neoflex™ Series product

Neoflex #NTRL 1010
Tropicana Aquarium
Scheveningen, The Netherlands



Neoflex NTRL Series



REPHOUSE
www.rephouse.com


NATURAL SERIES

10 Standard Colors.

Neoflex™ NTRL Series Colors




Neoflex NTRL Series



REPHOUSE
www.rephouse.com




NTRL 1001

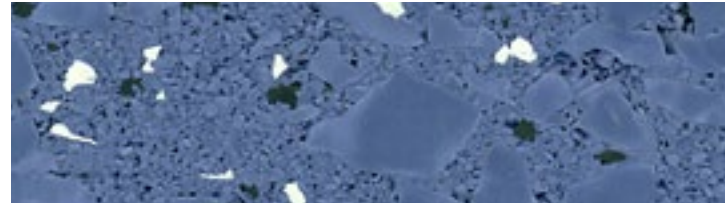

NTRL 1002




NTRL 1003

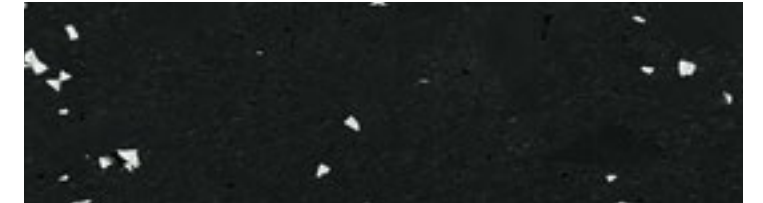


NTRL 1004




NTRL 1005

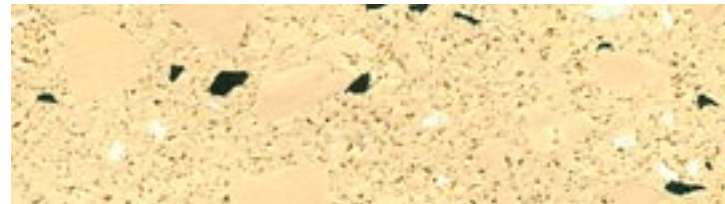


NTRL 1006

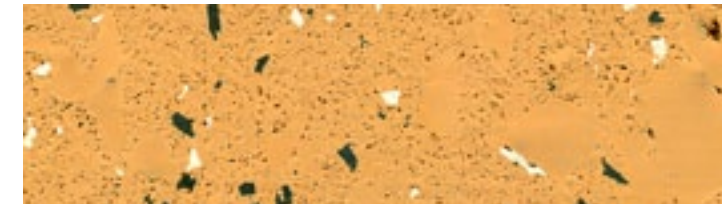


NTRL 1007

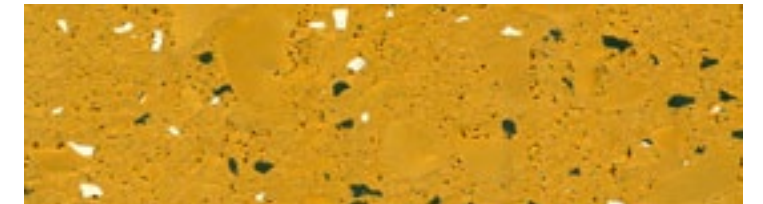


NTRL 1008

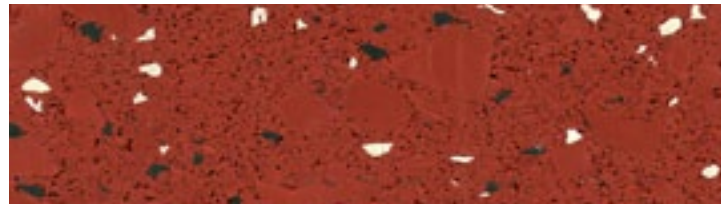

NTRL 1009

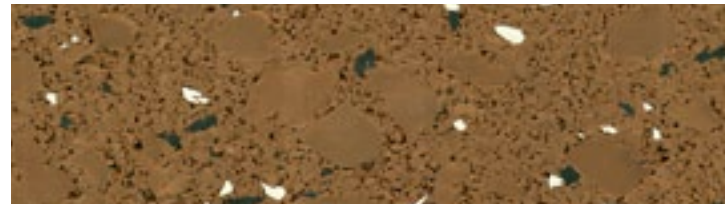


NTRL 1010

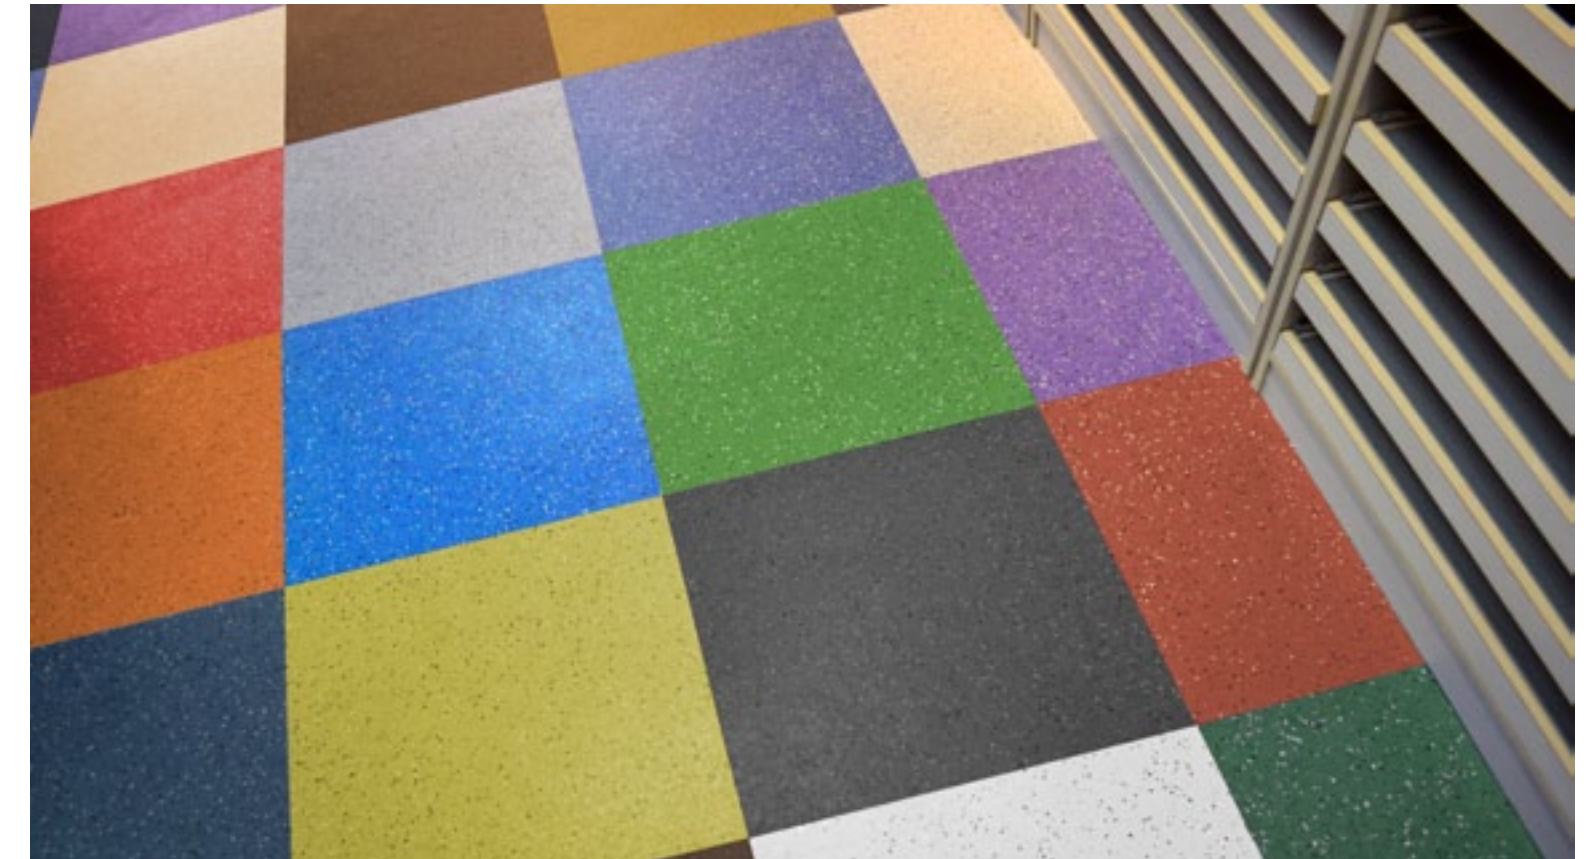



Neoflex NTRL Series



REPHOUSE
www.rephouse.com



Neoflex #NTRL 1004
Magna Carta Offices
Amsterdam, The Netherlands


The dynamic choice.

Neoflex™ Reco Series

- 100% Synthetic EPDM Rubber
- 75% Recycled
- The most affordable 100% Synthetic EPDM flooring solution
- No smell
- Compliant to ASTM E648, Class 2
- 3 Different chips sizes
 - Reco S
 - Reco L
 - Reco XL



Neoflex Reco Series




REPHOUSE
www.rephouse.com




RECO SERIES

3 Different Chip Sizes.

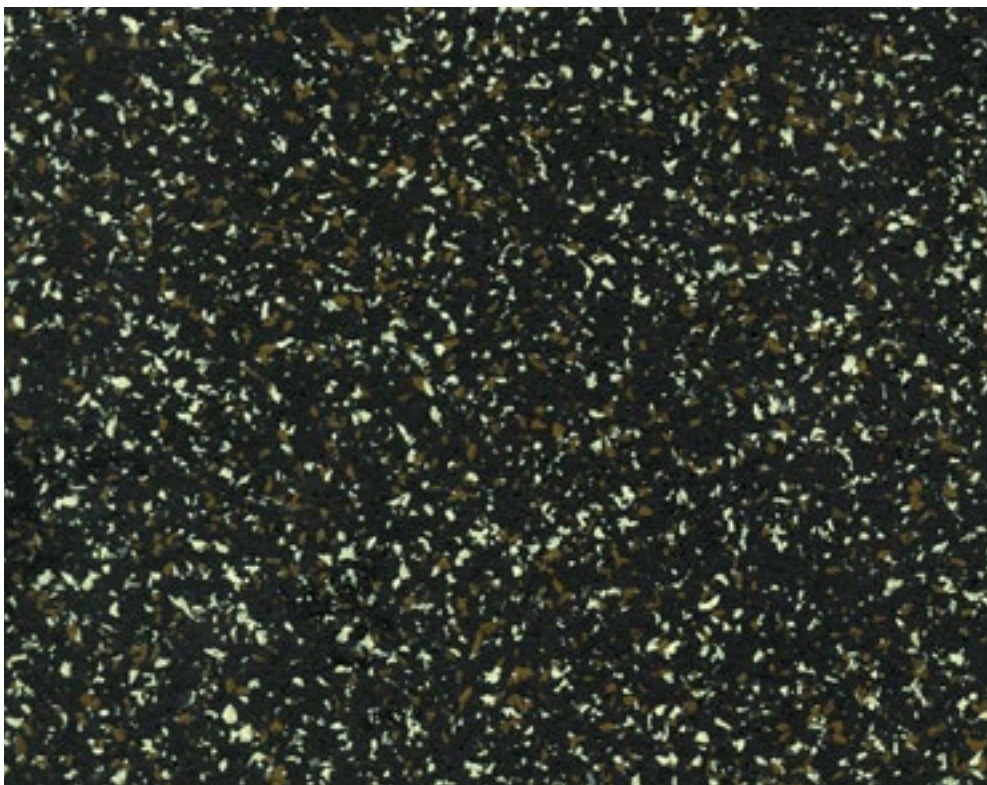


Reco S Series.

Small chips.

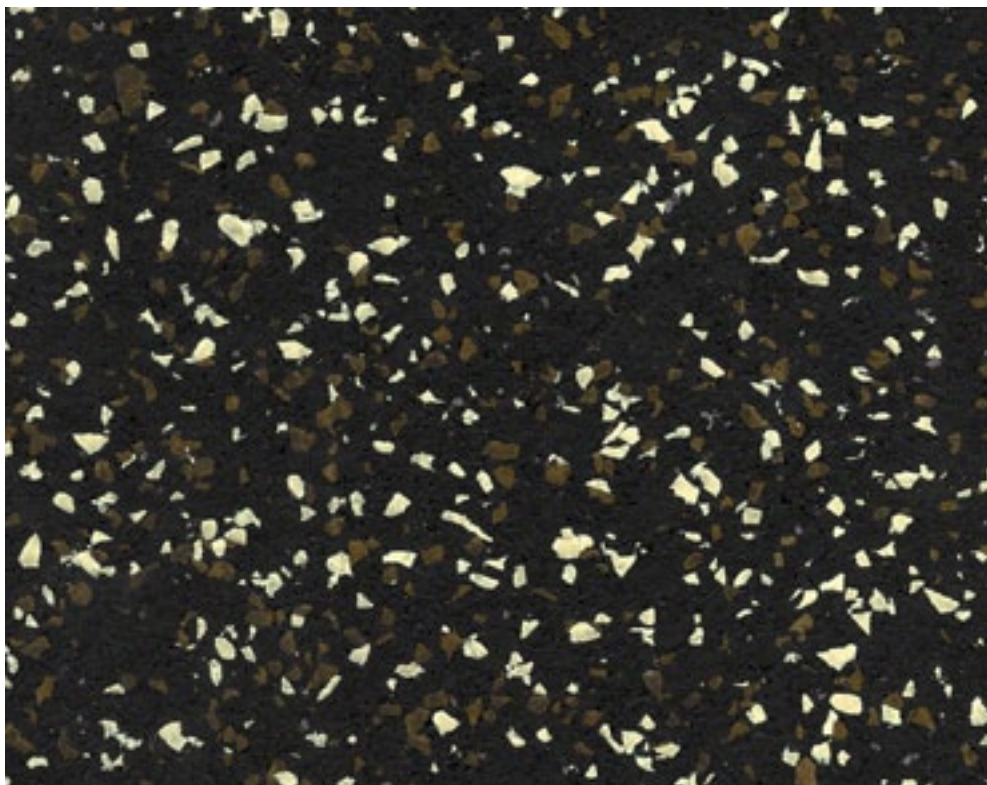

Reco L Series.

Large chips.

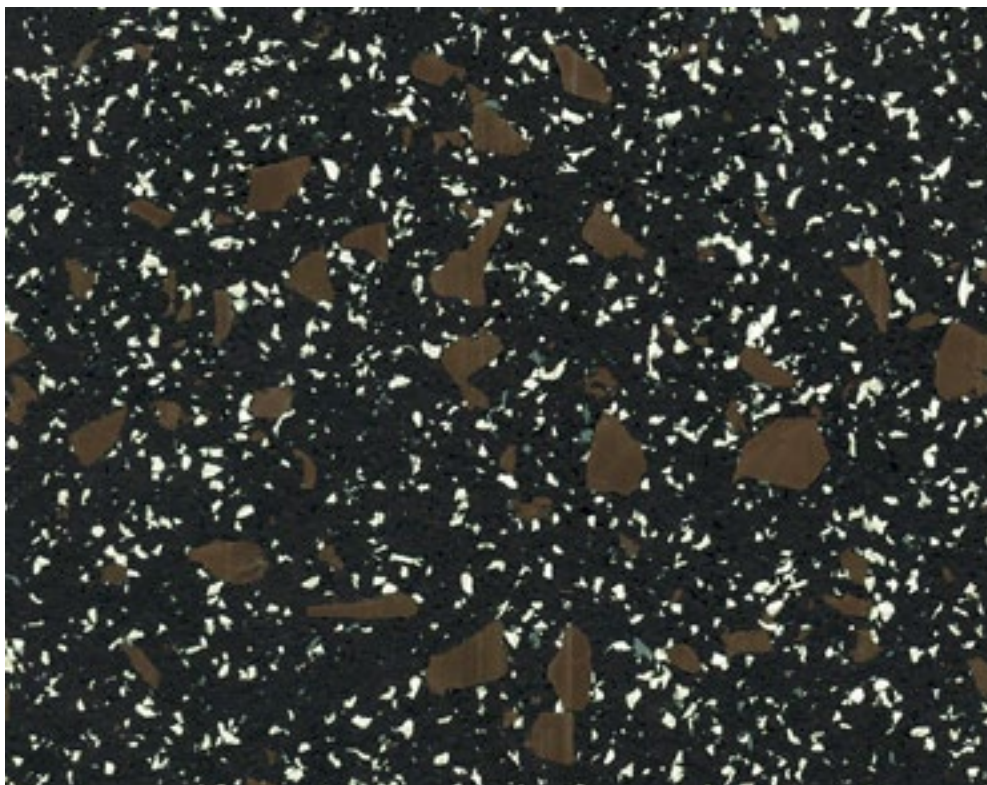

Reco XL Series.


Extra Large chips.

36 Reco Colors.


12 Neoflex™ Reco S Series Colors.




RS 101

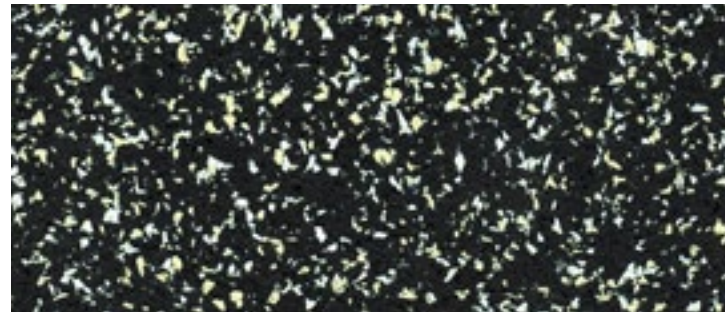


RS 102

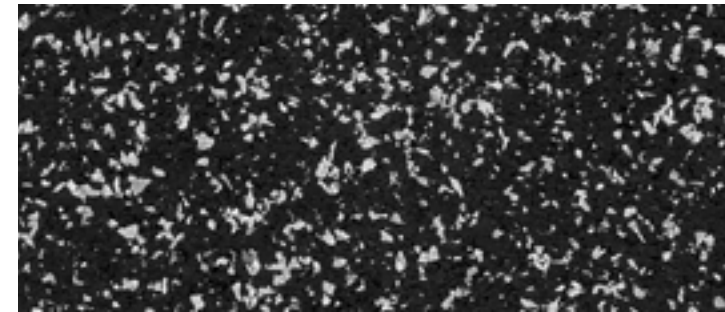


RS 103

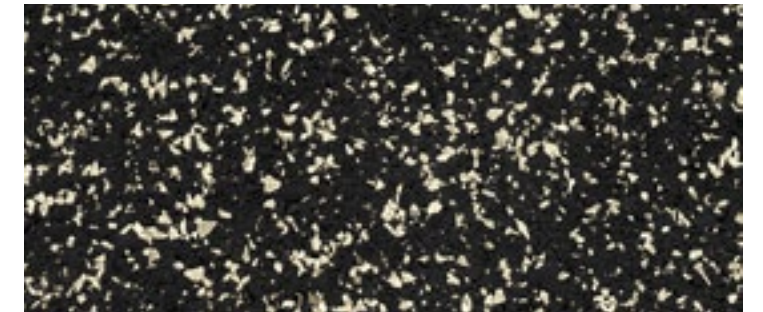


RS 104

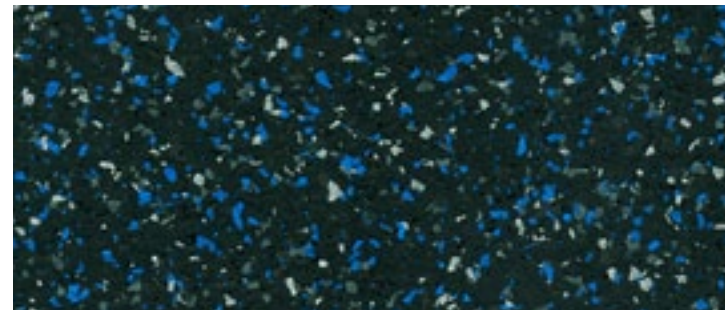


RS 105

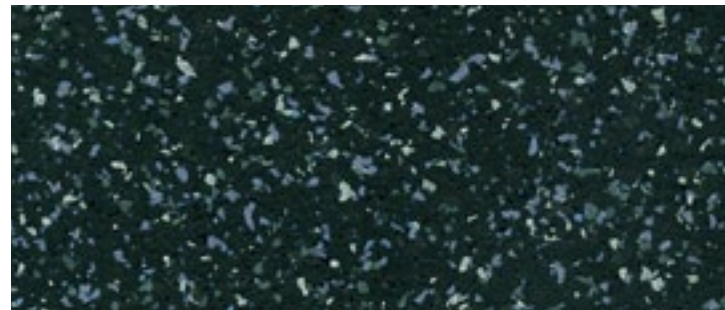


RS 106

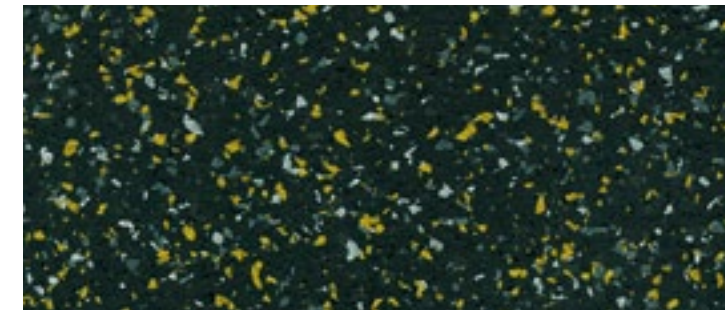


RS 107

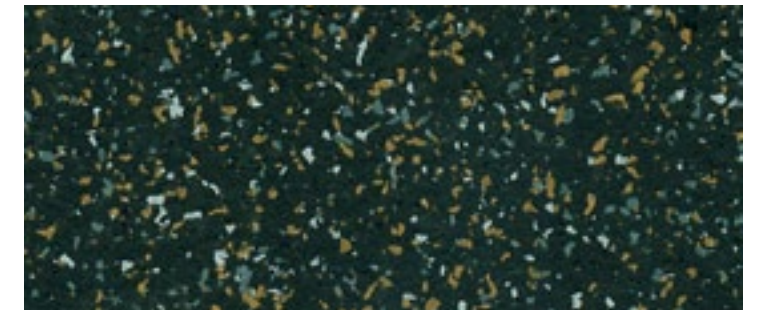


RS 108

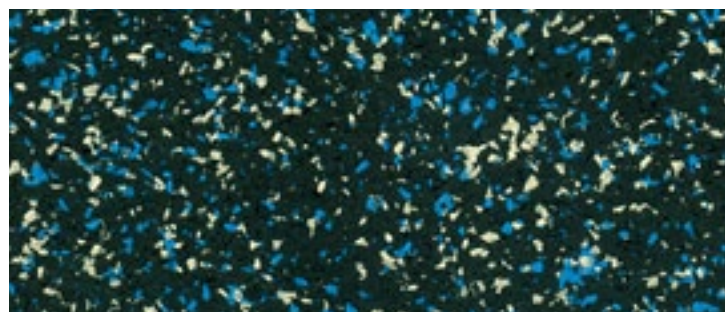


RS 109

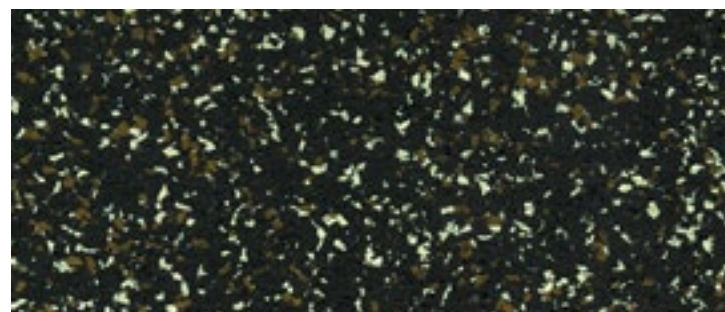

RS 110

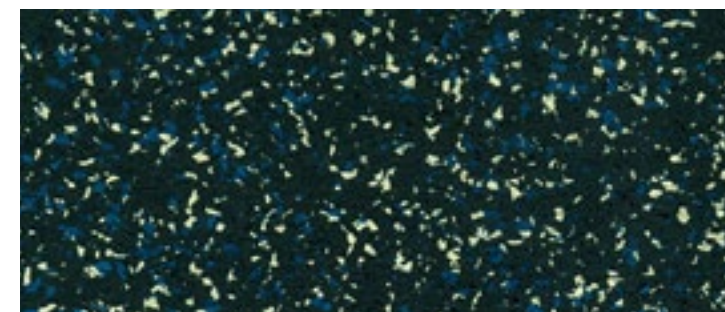


RS 111

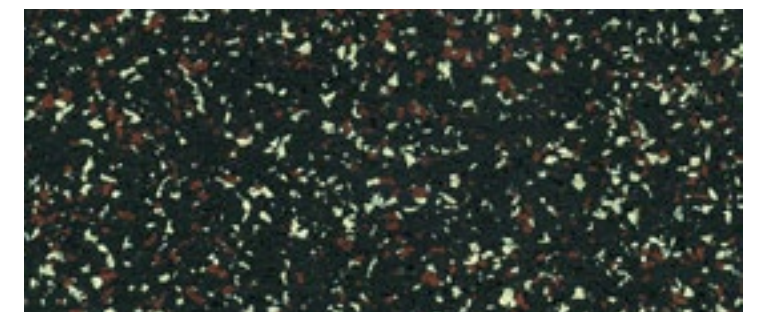

RS 112




Neoflex Reco S Series




REPHOUSE
www.rephouse.com

36 Reco Colors.


12 Neoflex™ Reco L Series Colors.

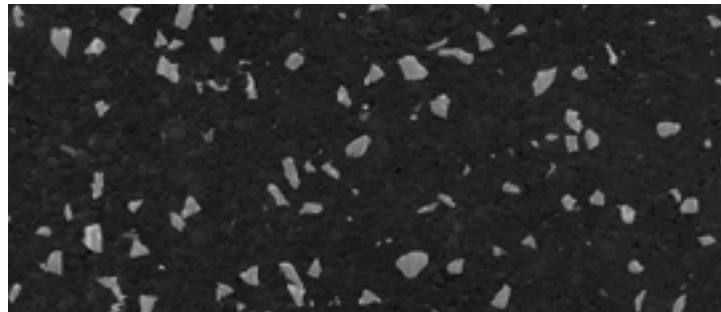


RL 201

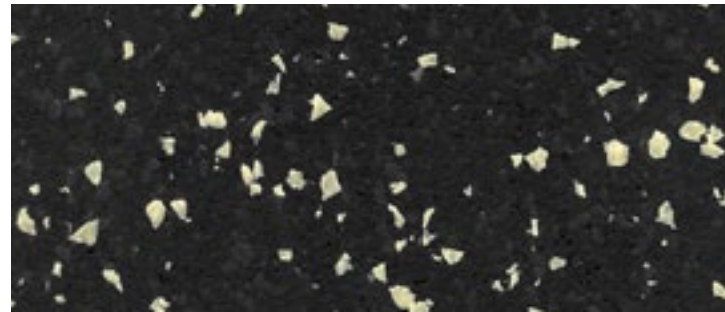


RL 202

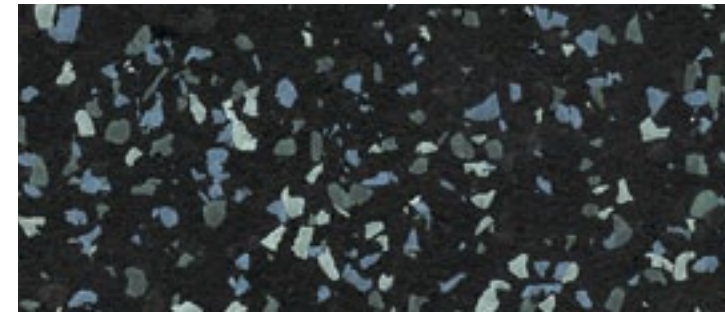


RL 203

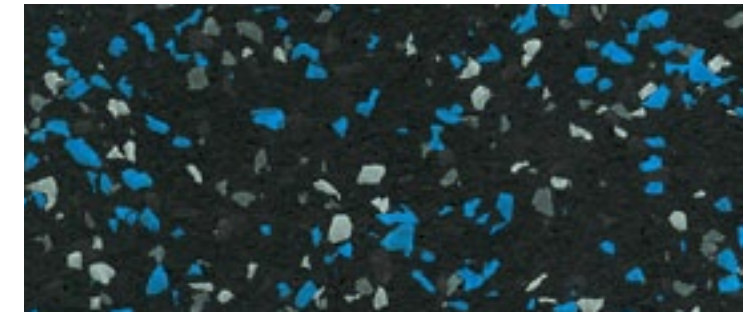


RL 204

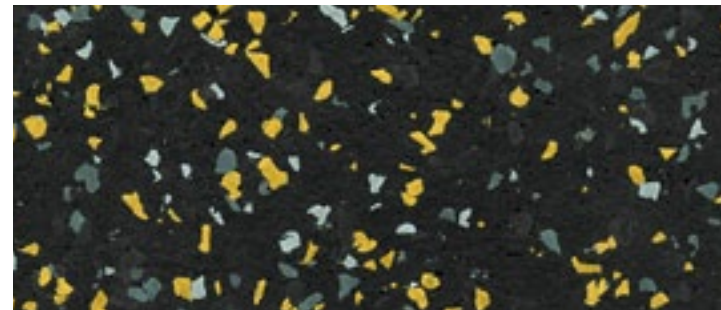

RL 205

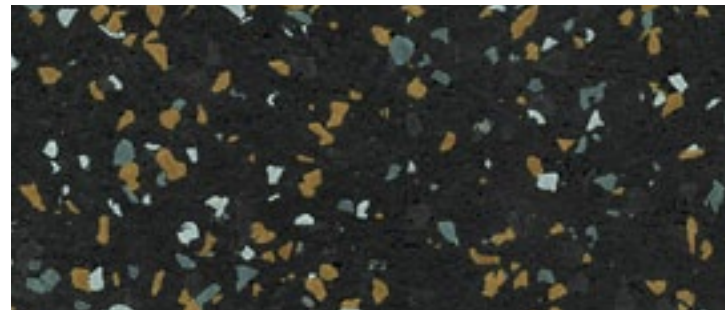


RL 206

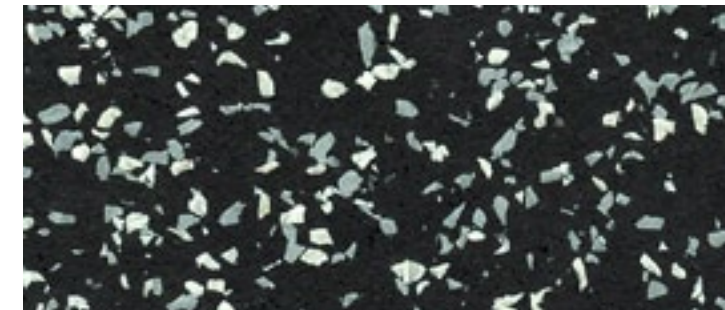


RL 207




RL 208

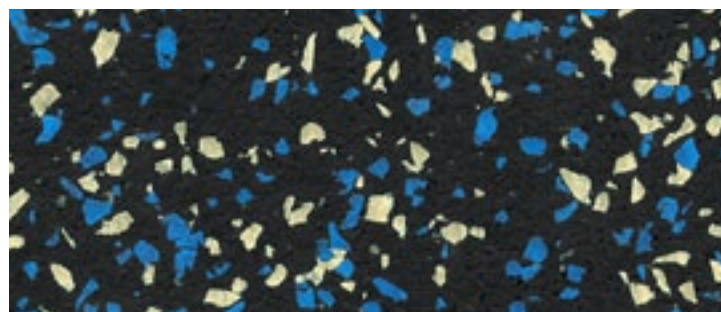


RL 209

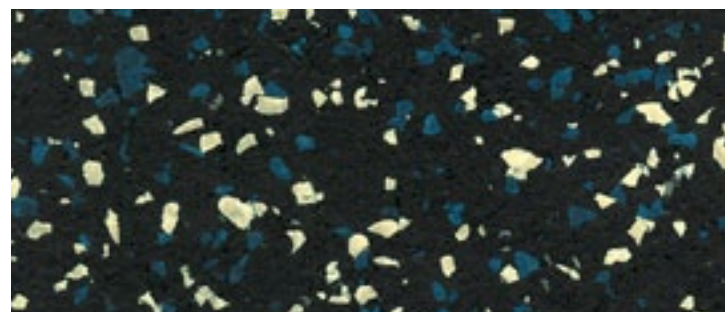

RL 210

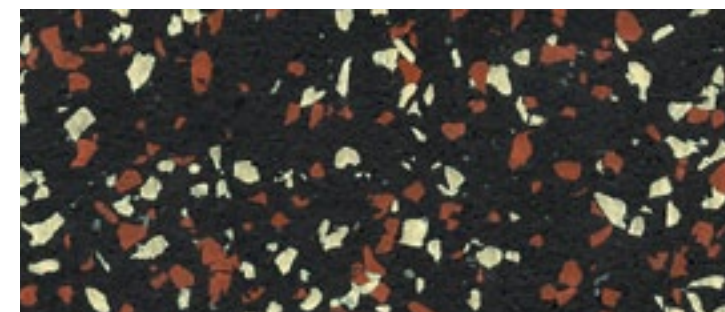

RL 211

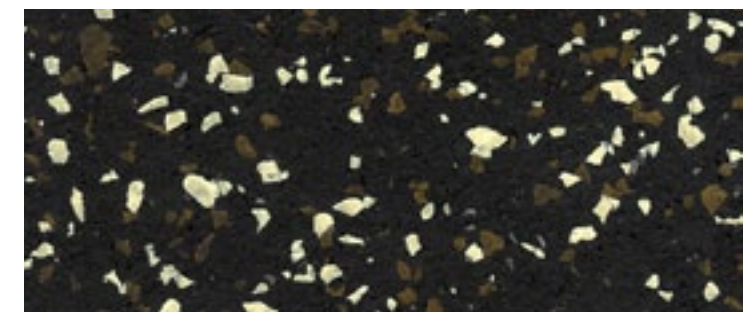

RL 212




Neoflex™
RESILIENT FLOORING
Neoflex Reco L Series




REPHOUSE
www.rephouse.com

36 Reco Colors.


12 Neoflex™ Reco XL Series Colors.

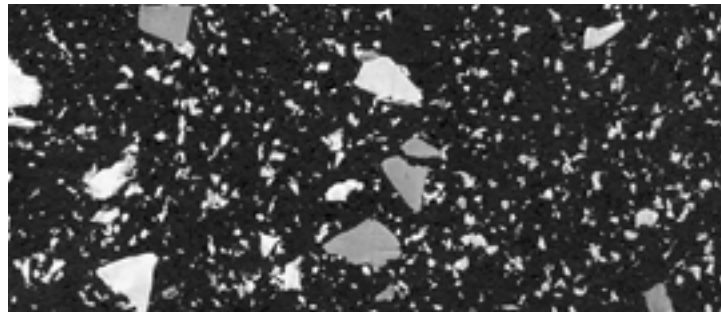


RXL 301

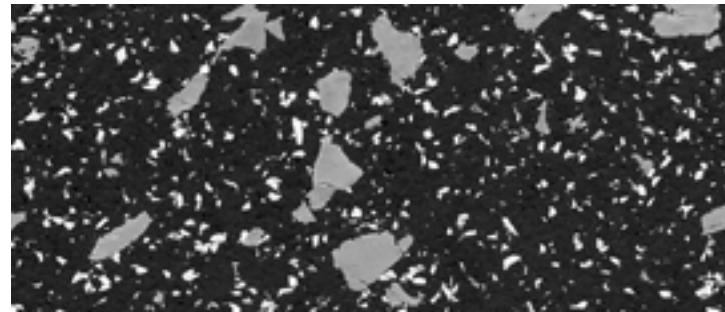


RXL 302

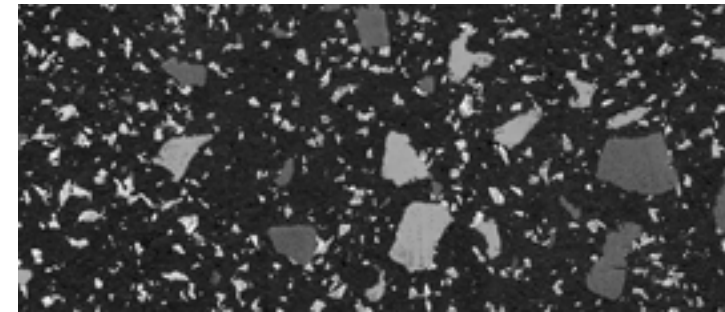


RXL 303

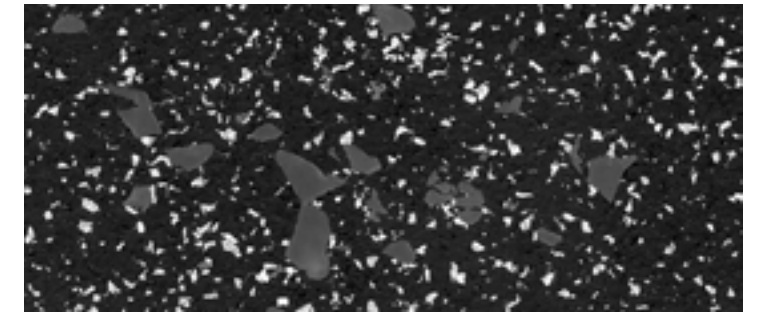


RXL 304

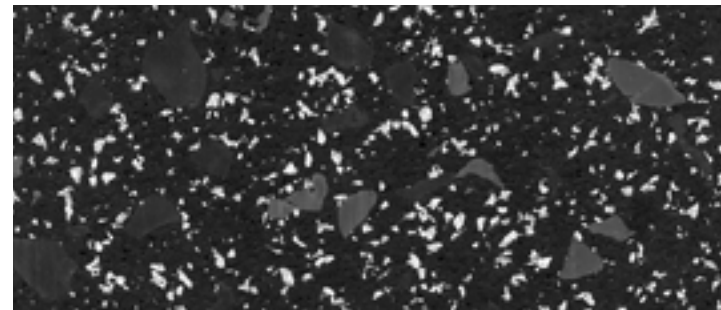


RXL 305

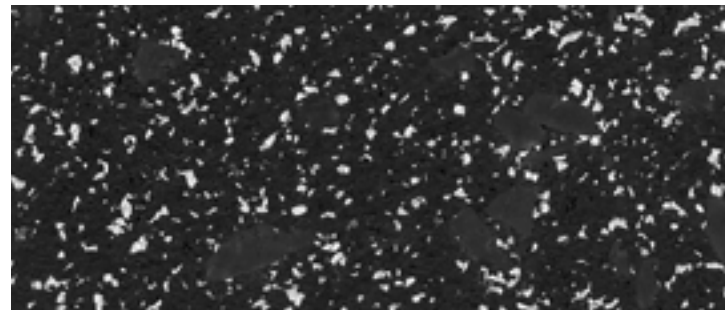


RXL 306

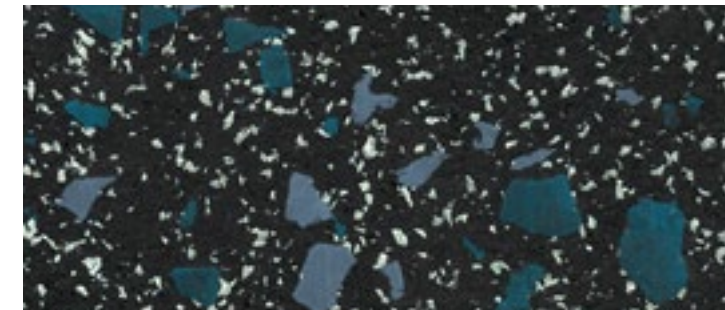


RXL 307

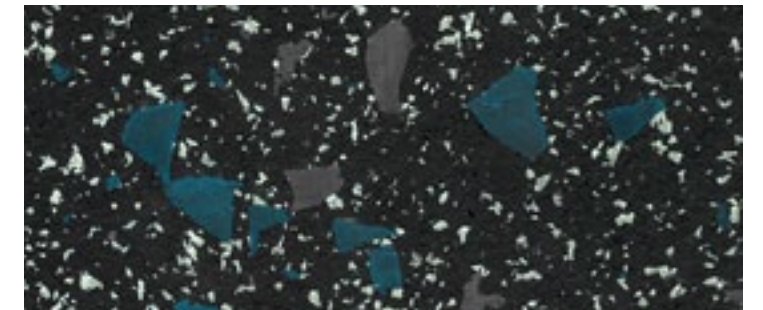


RXL 308

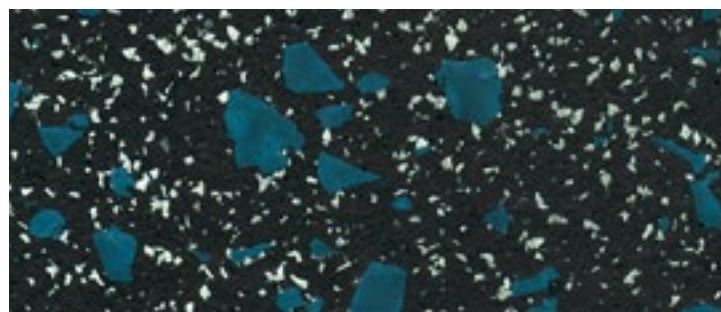


RXL 309

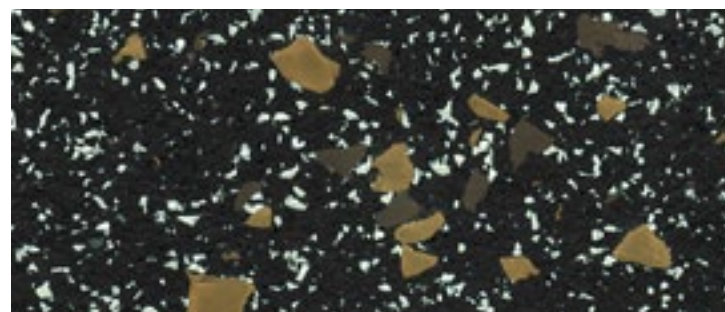

RXL 310

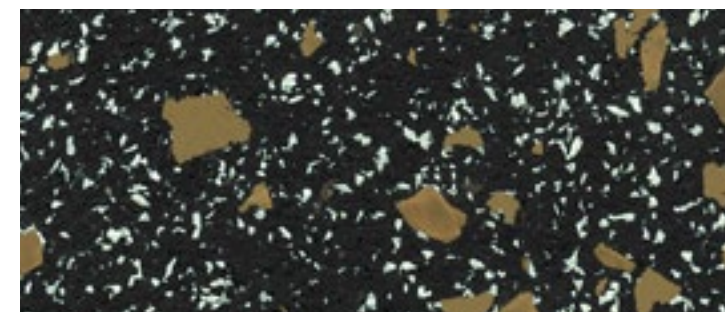


RXL 311

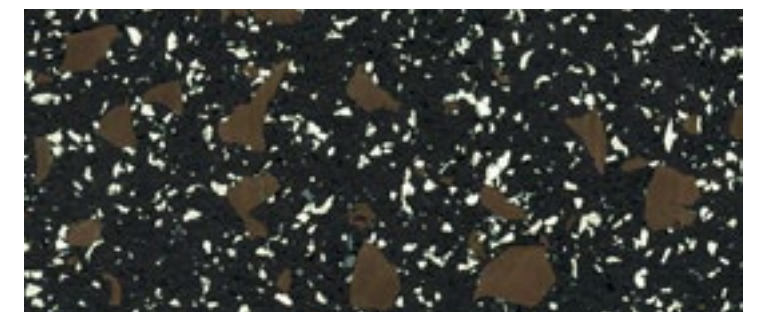

RXL 312



Neoflex Reco L Series



REPHOUSE
www.rephouse.com



Big Friggin' Chips.


Neoflex™ BFC Series

- Neoflex™ 600 & 700 Series Flooring can also be supplied in a BFC format
- Nominate any standard colors and choose one color to supersize
- Adds a dynamic aesthetic feature to the floor
- Talk to us about designing your own BFC Series floor from scratch!

Neoflex #714-BFC
Casino Beverwijk
The Netherlands



Neoflex BFC Series




REPHOUSE
www.rephouse.com



BFC SERIES



Neoflex BFC Series



REHOUSE
www.rehouse.com



Neoflex #600-BFC Custom Color
Megabox Shopping Center
Hong Kong


It's all about choices.

Neoflex™ Think Color Program

- Didn't see a color that you liked? Create your own!
- Online custom color webtool at www.rephouse.com
- Allows designers, architects & customers to fine tune color combinations as they wish
- We are flexible with requests that aren't achievable on the webtool



Think Color



REPHOUSE
www.rephouse.com



THINK COLOR

Neoflex Flooring Specifications

Description	Test Method	600 Series	700 Series	800 Series	Natural Series	Reco Series
Thickness		3 to 10 mm 1/8" to 3/8"	3 to 10 mm 1/8" to 3/8"	3 to 10 mm 1/8" to 3/8"	3 to 10 mm 1/8" to 3/8"	3 to 10 mm 1/8" to 3/8"
Roll Width		1.2 m / 4'	1.2 m / 4'	1.2 m / 4'	1.2 m / 4'	1.2 m / 4'
Density		1,300 kg/m ³ 81.04 lb/ft ³	1,300 kg/m ³ 81.04 lb/ft ³	1,300 kg/m ³ 81.04 lb/ft ³	1,400 kg/m ³ 87.28 lb/ft ³	1,200 kg/m ³ 74.81 lb/ft ³
Resilience	DIN 18032-2	40%	42%	40%	40%	40%
Tensile Strength	DIN 18032-2	0.91 N/mm ²	1.31 N/mm ²	0.91 N/mm ²	0.91 N/mm ²	0.91 N/mm ²
Tear Strength	ASTM D 624	9.7 N/mm	1.31 N/mm	9.7 N/mm	9.7 N/mm	9.7 N/mm
Taber Abrasion	ASTM C 504	0.66 gm	0.46 gm	0.66 gm	0.66 gm	0.66 gm
Shore Hardness	ASTM D2240	60	65	60	60	60
Remaining Indentation	DIN 53960	0.05 mm	0.04 mm	0.05 mm	0.05 mm	0.05 mm
Noise Absorption	EN20140/ISO140	13 dB (4 mm)	13 dB (4 mm)	13 dB (4 mm)	13 dB (4 mm)	13 dB (4 mm)
Slip Resistance	AS/NZS 4596:1999	R10	R10	R10	R10	R10
Static Coefficient of Friction	ASTM D2047-97	Dry Wet	1.10 1.03	1.09 1.02	1.10 1.03	1.09 1.02
Stainability	ASTM D543-95 Alcohol Ammonia	No Change No Change	No Change No Change	No Change No Change	No Change No Change	No Change No Change
Flammability	ASTM D2859 ASTM E648 EN 13501 AS ISO9239.1:2003 IMO FTPC Part 5 Res.A653(16) CFE Q _{ab} Q _t q _p Burning Drops	Class 1 Class 1 C _{fi} -s1 8.1 kW/m ² 13,2 kW/m ² 2,4 M/J ² 1,9 MJ 5,6 kW None	Class 1 Class 1 C _{fi} -s1 5.2 kW/m ² Not rated Not rated Not rated Not rated Not rated	Class 1 Class 1 B _{fi} -s1 5.2 kW/m ² 13,2 kW/m ² 2,4 M/J ² 1,9 MJ 5,6 kW None	Class 1 Class 1 C _{fi} -s1 8.1 kW/m ² 13,2 kW/m ² 2,4 M/J ² 1,9 MJ 5,6 kW None	Class 1 Class 2 D _{fi} -s2 4.3 kW/m ² Not rated Not rated Not rated Not rated Not rated
Smoke	ASTM E662 Non Flaming Avg Dmc Flaming Avg Dmc AS 1530.3:1999 Smoke Developed Index AS ISO 9239.1 – 2003	358 245 5 298% .min	477.9 377.1 5 594% .min	358 245 5 298% .min	358 245 Not rated 298% .min	444 243 Not rated 231% .min
Total VOC	ASTM D5116	< 0.3 mg/m ² /hr	< 0.3 mg/m ² /hr	0.3 mg/m ² /hr	< 0.3 mg/m ² /hr	< 0.3 mg/m ² /hr