



**BALLISTIC**  
RUBBER PRODUCTS





**REPHOUSE**  
www.rephouse.com

# BALLISTIC RUBBER PRODUCTS

Rephouse Ballistic Rubber Tiles exhibit tremendous capturing properties to prevent ricochets and lead splashbacks thereby reducing lead dust propagated from repeated range firing. Rephouse Ballistic Rubber Tiles can be installed on walls, baffles, ceilings and floors and collectively are helpful in attenuating noise. The finished surface is smooth with no protruding edges.

Rephouse Ballistic Safety Flooring is a seamless polyurethane floor covering is ideal for indoor shooting ranges. The finished floor surface is smooth and dense with no floor joints that can provide an impact edge. Evoflex can be easily cleaned either using a dry or wet vacuum method.

The surfacing program is complimented with Rubber Interlocking Pavers, Shooting Blocks and Fragmentation Rubber Sheet.



Black Rubber Base  
Polyurethane Pore Sealer  
Polyurethane Wear Coat  
Polyurethane Top Coat

- A.** Ballistic Rubber Tiles
- B.** Ballistic Seamless Flooring



## Ballistic Fragmentation Rubber Sheet

Available in varying lengths and thickness. This product is suspended and absorbs fragments and bullet rebounds.

Density:  $\pm 800$  kg/m<sup>3</sup>.

Length : to order.

Thickness: 12 mm.

Width: 1.20 m



## Ballistic Interlocking Pavers

Made of tough rubber particles that are bound by a MDI polyurethane binder. These pavers are excellent for walkways and shooting stands and exhibit excellent capturing properties to prevent ricochets.

Size: 200 mm x 160/115 mm

Thickness: 45 mm Density:  $\pm 860$  kg/m<sup>3</sup>




## Ballistic Shooting Blocks

For bullet traps. Self aligning when installed and can be installed in layers and to just about any height and depth providing complete flexibility in shooting range design.

Size: 600 mm x 300 mm x 225 mm.

Weight  $\pm 34.5$  kg/pc.

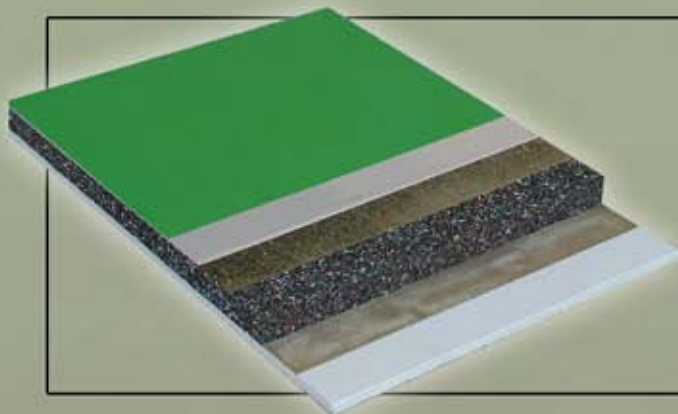


## Ballistic Seamless Flooring

Available from 12 mm to 45 mm thickness. Evoflex consists of a rubber base mat which is finished with a pore sealer, self leveling wear coat and colored top coat. It is totally seamless and impermeable.

## Ballistic Rubber Tiles

Made of tough rubber particles that are bound by a MDI polyurethane binder. They exhibit excellent capturing properties to prevent ricochets. Available in 505 mm x 505 mm, 605 mm x 605 mm and 1010 mm x 505 mm and 1010 mm x 1010 mm sizes.

Thickness: 45 mm. Density:  $\pm 800$  kg/m<sup>3</sup>.

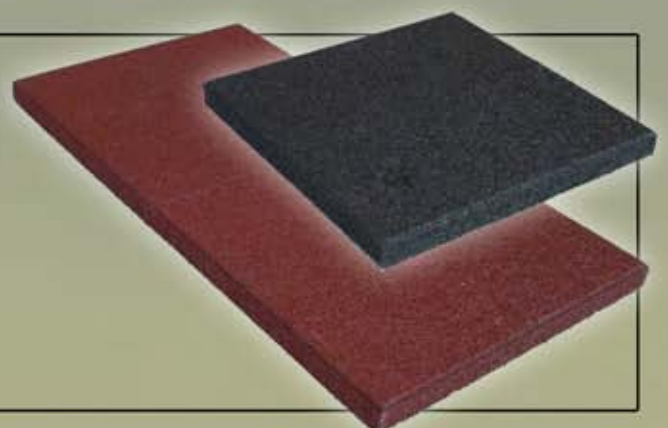





**REPHOUSE**  
[www.rephouse.com](http://www.rephouse.com)