

REPHOUSE
www.rephouse.com



**FITNESS &
WEIGHT ROOM
RUBBER FLOORING**

Neo flex™
RESILIENT FLOORING

Neoflex is an environmentally friendly, homogeneous EPDM/recycled rubber floor covering made for fitness and recreational facilities. Direction free polymetrically bound rubber chips give Neoflex an attractive and smart appearance. Since its introduction, Neoflex™ has satisfied costumers around the world of a host of fitness centers and weight rooms.



Great Features

- Resistant to wear
- Low Abrasion
- Permanently Elastic
- Sound deadening
- Slip Resistant
- Anti Static
- Flexible
- Comfortable



Think Color - Create Your Own Floor

Try our fully interactive floor design program to bring infinite colour design options straight to your computer screen.


Visit www.rephouse.com/thinkcolor

Dimensions


Roll
L: 10-20 m
W: 1.2 m




Tile
608 x 608 mm




Interlock
575 x 595 mm




500 SERIES

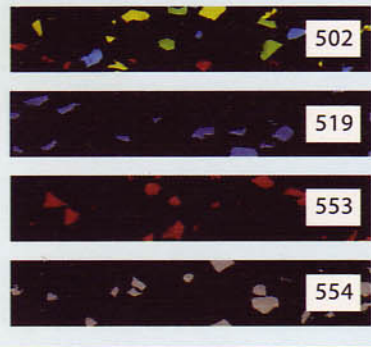

600 SERIES

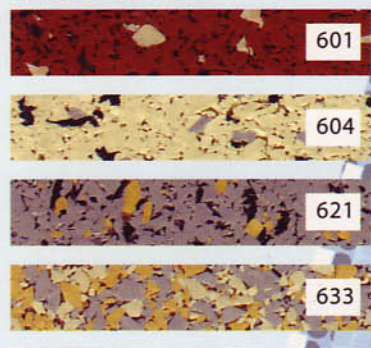

700 SERIES

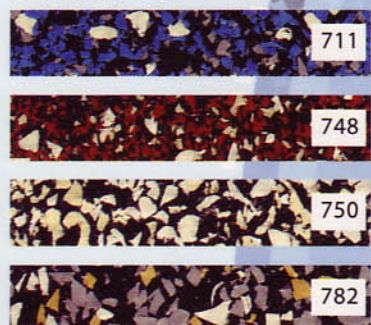

SPECIFICATIONS

	500 Series	600 Series	700 Series	800 Series
Density	1,000 kg/m ³	1,300 kg/m ³	1,150 kg/m ³	1,300 kg/m ³
Material	Polymerically bound recycled & synthetic rubbers			
Thickness	3 - 10 mm	3 - 10 mm	3 - 10 mm	3 - 10 mm
Roll Length	10 - 25 m	10 - 25 m	10 - 25 m	10 - 25 m
Roll Width	1.2 m	1.2 m	1.2 m	1.2 m
Tile Size	608 x 608 mm	608 x 608 mm	608 x 608 mm	608 x 608 mm
Resilience	49%	40%	42%	40%
Tensile Strength	1.39 N/mm ²	0.91 N/mm ²	1.31 N/mm ²	0.91 N/mm ²
Tear Strength	9.7 N/mm	9.7 N/mm	11.5 N/mm	9.7 N/mm
Shore 'a' Hardness	60	60	65	60
Noise Absorption	18 dB [10mm]	13 dB [4 mm]	13 dB [4 mm]	13 dB [4 mm]
Flammability ASTM D 2859	Class 1	Class 1	Class 1	Class 1

800 SERIES

